

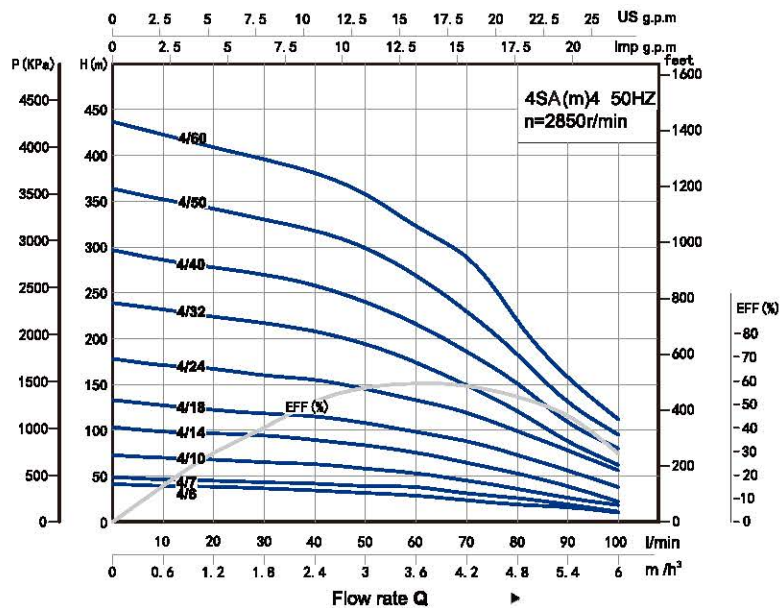
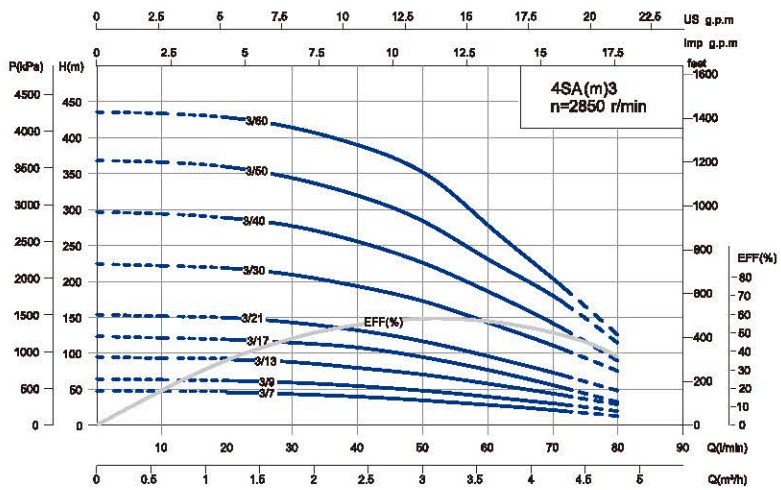
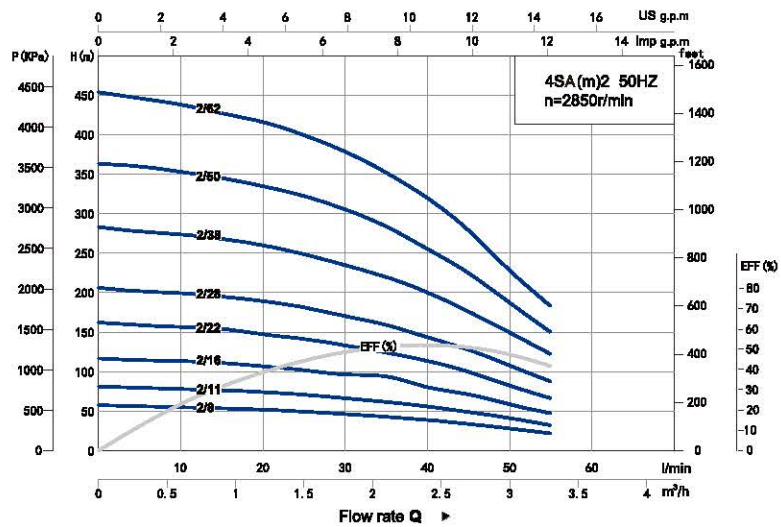
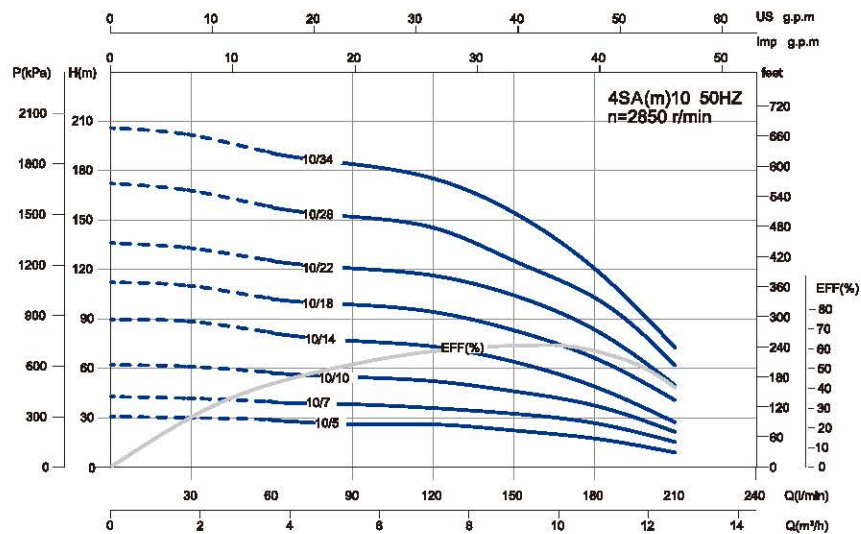




## Performance Curve

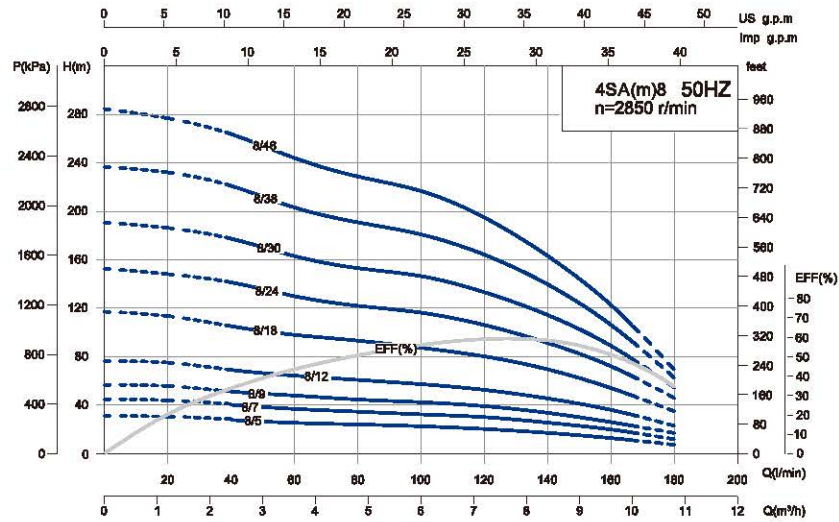

## Performance Curve

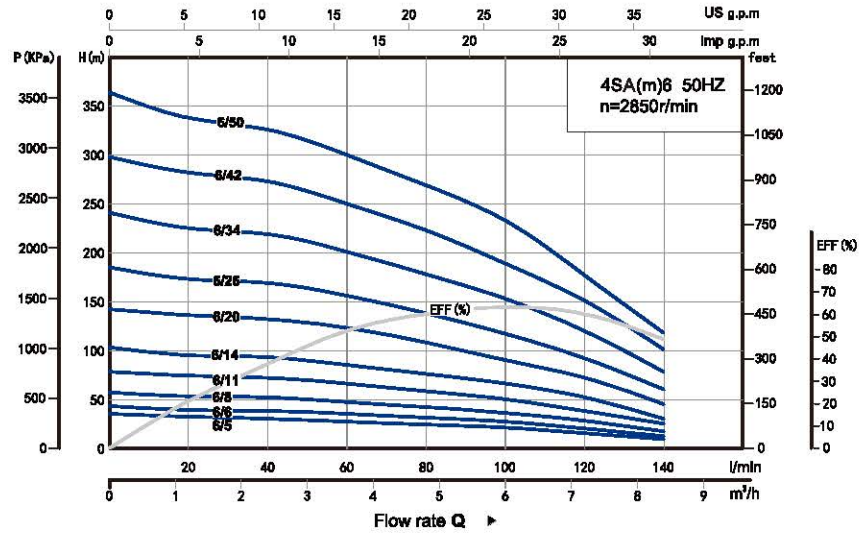

## Performance Curve

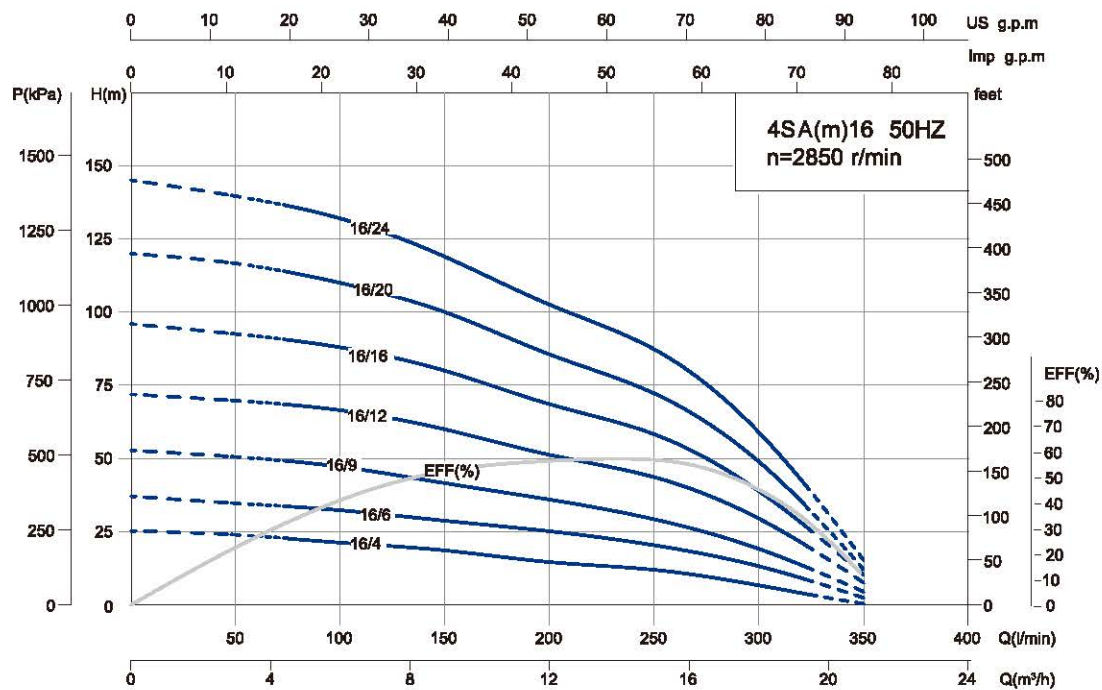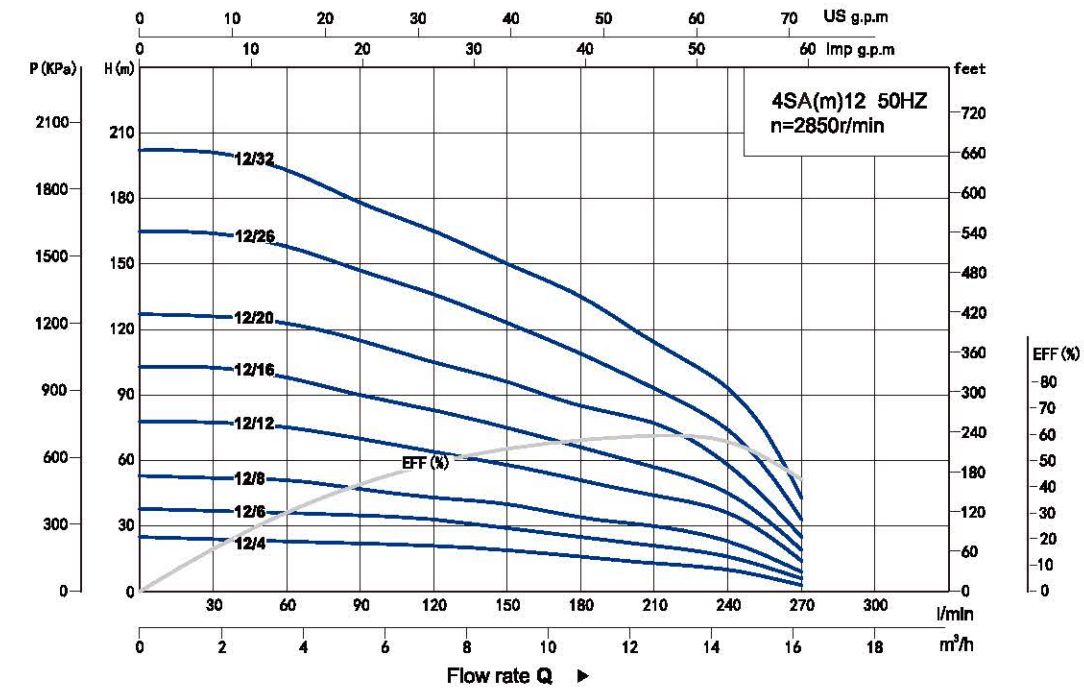

| Model        |             | Power |      | Rate Current (A) |             | Flow              |     |     |     |     |     |     |     |     |     |     |     |     |     | Head Range (m) |
|--------------|-------------|-------|------|------------------|-------------|-------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----------------|
| Single-Phase | Three-Phase | kW    | HP   | Single-Phase     | Three-Phase | m <sup>3</sup> /h | 0   | 0.3 | 0.6 | 0.9 | 1.2 | 1.5 | 1.8 | 2.1 | 2.4 | 2.7 | 3   | 3.3 | 3.6 |                |
| 220V         | 380V        |       |      | 220V             | 380V        | l/min             | 0   | 5   | 10  | 15  | 20  | 25  | 30  | 35  | 40  | 45  | 50  | 55  | 60  |                |
| 4SAm2/8      | -           | 0.37  | 0.5  | 4.2              | -           | H(m)              | 58  | 56  | 55  | 54  | 52  | 50  | 46  | 43  | 38  | 34  | 27  | 21  | 15  | 55~22          |
| 4SAm2/11     | -           | 0.55  | 0.75 | 5.2              | -           |                   | 80  | 80  | 79  | 77  | 74  | 71  | 67  | 62  | 56  | 49  | 41  | 32  | 23  | 77~34          |
| 4SAm2/16     | 4SA2/16     | 0.75  | 1    | 6.9              | 2.7         |                   | 117 | 114 | 113 | 111 | 106 | 102 | 96  | 94  | 80  | 71  | 58  | 47  | 35  | 113~49         |
| 4SAm2/22     | 4SA2/22     | 1.1   | 1.5  | 9.5              | 3.6         |                   | 162 | 159 | 156 | 154 | 147 | 141 | 133 | 124 | 113 | 100 | 82  | 66  | 50  | 156~69         |
| 4SAm2/28     | 4SA2/28     | 1.5   | 2    | 12.2             | 4.8         |                   | 206 | 202 | 199 | 195 | 189 | 181 | 170 | 159 | 143 | 128 | 108 | 87  | 62  | 199~91         |
| 4SAm2/38     | 4SA2/38     | 2.2   | 3    | 17.3             | 6.4         |                   | 283 | 278 | 274 | 268 | 260 | 249 | 235 | 220 | 200 | 176 | 150 | 122 | 91  | 274~127        |
| -            | 4SA2/50     | 3     | 4    | -                | 10.5        |                   | 364 | 360 | 353 | 345 | 335 | 323 | 306 | 284 | 256 | 225 | 188 | 150 | 109 | 353~156        |
| -            | 4SA2/62     | 4     | 5.5  | -                | 12.7        |                   | 454 | 446 | 438 | 427 | 416 | 400 | 379 | 352 | 320 | 279 | 228 | 183 | 135 | 438~190        |

| Model        |             | Power |      | Rate Current (A) |             | Flow              |     |     |     |     |     |     |     |     |     | Head Range (m) |
|--------------|-------------|-------|------|------------------|-------------|-------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|----------------|
| Single-Phase | Three-Phase | kW    | HP   | Single-Phase     | Three-Phase | m <sup>3</sup> /h | 0   | 0.6 | 1.2 | 1.8 | 2.4 | 3   | 3.6 | 4.2 | 4.8 |                |
| 220V         | 380V        |       |      | 220V             | 380V        | l/min             | 0   | 10  | 20  | 30  | 40  | 50  | 60  | 70  | 80  |                |
| 4SAm3/7      | -           | 0.37  | 0.5  | 4.2              | -           | H(m)              | 49  | 48  | 47  | 44  | 40  | 35  | 28  | 23  | 12  | 47~25          |
| 4SAm3/9      | -           | 0.55  | 0.75 | 5.2              | -           |                   | 65  | 64  | 63  | 60  | 55  | 48  | 40  | 30  | 19  | 63~35          |
| 4SAm3/13     | 4SA3/13     | 0.75  | 1    | 6.9              | 2.7         |                   | 96  | 93  | 92  | 89  | 80  | 71  | 58  | 44  | 28  | 92~51          |
| 4SAm3/17     | 4SA3/17     | 1.1   | 1.5  | 9.5              | 3.6         |                   | 125 | 122 | 120 | 116 | 109 | 95  | 77  | 56  | 32  | 120~67         |
| 4SAm3/21     | 4SA3/21     | 1.5   | 2    | 12.2             | 4.8         |                   | 155 | 153 | 150 | 144 | 133 | 117 | 96  | 73  | 48  | 150~85         |
| 4SAm3/30     | 4SA3/30     | 2.2   | 3    | 17.3             | 6.4         |                   | 225 | 223 | 219 | 210 | 194 | 173 | 143 | 111 | 75  | 219~127        |
| -            | 4SA3/40     | 3     | 4    | -                | 10.5        |                   | 297 | 295 | 289 | 278 | 256 | 226 | 186 | 142 | 89  | 289~165        |
| -            | 4SA3/50     | 4     | 5.5  | -                | 12.7        |                   | 369 | 367 | 360 | 344 | 320 | 284 | 231 | 180 | 114 | 360~206        |
| -            | 4SA3/60     | 5.5   | 7.5  | -                | 17.5        |                   | 436 | 434 | 429 | 415 | 387 | 352 | 273 | 204 | 125 | 429~241        |

| Model        |             | Power |      | Rate Current (A) |             | Flow              |     |     |     |     |     |     |     |     |     |     |     | Head Range (m) |
|--------------|-------------|-------|------|------------------|-------------|-------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----------------|
| Single-Phase | Three-Phase | kW    | HP   | Single-Phase     | Three-Phase | m <sup>3</sup> /h | 0   | 0.6 | 1.2 | 1.8 | 2.4 | 3   | 3.6 | 4.2 | 4.8 | 5.4 | 6   |                |
| 220V         | 380V        |       |      | 220V             | 380V        | l/min             | 0   | 10  | 20  | 30  | 40  | 50  | 60  | 70  | 80  | 90  | 100 |                |
| 4SAm4/6      | -           | 0.37  | 0.5  | 4.2              | -           | H(m)              | 42  | 40  | 39  | 37  | 35  | 32  | 29  | 24  | 19  | 16  | 10  | 39~15          |
| 4SAm4/7      | -           | 0.55  | 0.75 | 5.2              | -           |                   | 50  | 46  | 45  | 43  | 42  | 39  | 38  | 31  | 26  | 19  | 11  | 45~19          |
| 4SAm4/10     | 4SA4/10     | 0.75  | 1    | 6.9              | 2.7         |                   | 74  | 71  | 69  | 66  | 64  | 59  | 54  | 46  | 37  | 27  | 19  | 69~30          |
| 4SAm4/14     | 4SA4/14     | 1.1   | 1.5  | 9.5              | 3.6         |                   | 104 | 99  | 97  | 95  | 90  | 84  | 76  | 65  | 53  | 39  | 22  | 97~43          |
| 4SAm4/18     | 4SA4/18     | 1.5   | 2    | 12.2             | 4.8         |                   | 133 | 127 | 122 | 118 | 115 | 108 | 98  | 88  | 73  | 56  | 38  | 124~57         |
| 4SAm4/24     | 4SA4/24     | 2.2   | 3    | 17.3             | 6.4         |                   | 178 | 171 | 167 | 160 | 155 | 145 | 133 | 119 | 99  | 78  | 56  | 167~79         |
| -            | 4SA4/32     | 3     | 4    | -                | 10.5        |                   | 239 | 232 | 224 | 217 | 208 | 194 | 174 | 149 | 121 | 88  | 62  | 210~100        |
| -            | 4SA4/40     | 4     | 5.5  | -                | 12.7        |                   | 297 | 286 | 278 | 270 | 258 | 240 | 216 | 186 | 151 | 109 | 80  | 266~110        |
| -            | 4SA4/50     | 5.5   | 7.5  | -                | 17.5        | H(m)              | 364 | 352 | 342 | 330 | 318 | 299 | 269 | 230 | 183 | 131 | 95  | 336~177        |
| -            | 4SA4/60     | 7.5   | 10   | -                | 19.6        |                   | 437 | 423 | 409 | 396 | 381 | 358 | 323 | 289 | 220 | 158 | 112 | 404~210        |



| Model        |             | Power |      | Rate Current (A) |             | Flow  |     |     |     |     |     |     |     |     |         | Head Range (m) |
|--------------|-------------|-------|------|------------------|-------------|-------|-----|-----|-----|-----|-----|-----|-----|-----|---------|----------------|
| Single-Phase | Three-Phase | kW    | HP   | Single-Phase     | Three-Phase | m³/h  | 0   | 1.2 | 2.4 | 3.6 | 4.8 | 6   | 7.2 | 8.4 |         |                |
| 220V         | 380V        |       |      | 220V             | 380V        | l/min | 0   | 20  | 40  | 60  | 80  | 100 | 120 | 140 |         |                |
| 4SAm6/5      | -           | 0.37  | 0.55 | 4.2              | -           | H(m)  | 35  | 32  | 30  | 27  | 24  | 21  | 15  | 9   | 30~11   |                |
| 4SAm6/6      | -           | 0.55  | 0.75 | 5.2              | -           |       | 43  | 39  | 38  | 35  | 31  | 27  | 20  | 12  | 38~16   |                |
| 4SAm6/8      | 4SA6/8      | 0.75  | 1    | 6.9              | 2.7         |       | 57  | 53  | 52  | 47  | 42  | 36  | 28  | 17  | 52~22   |                |
| 4SAm6/11     | 4SA6/11     | 1.1   | 1.5  | 9.5              | 3.6         |       | 78  | 74  | 72  | 66  | 58  | 50  | 38  | 25  | 73~31   |                |
| 4SAm6/14     | 4SA6/14     | 1.5   | 2    | 12.2             | 4.8         |       | 103 | 95  | 93  | 85  | 76  | 66  | 52  | 30  | 93~40   |                |
| 4SAm6/20     | 4SA6/20     | 2.2   | 3    | 17.3             | 6.4         |       | 142 | 136 | 132 | 123 | 108 | 90  | 72  | 45  | 135~55  |                |
| -            | 4SA6/26     | 3     | 4    | -                | 10.5        |       | 185 | 173 | 169 | 156 | 138 | 117 | 92  | 60  | 172~75  |                |
| -            | 4SA6/34     | 4     | 5.5  | -                | 12.7        |       | 241 | 225 | 219 | 201 | 178 | 153 | 120 | 78  | 223~98  |                |
| -            | 4SA6/42     | 5.5   | 7.5  | -                | 17.5        |       | 298 | 282 | 273 | 250 | 223 | 189 | 151 | 101 | 278~130 |                |
| -            | 4SA6/50     | 7.5   | 10   | -                | 19.6        |       | 364 | 338 | 326 | 300 | 269 | 233 | 177 | 118 | 334~148 |                |


| Model        |             | Power |      | Rate Current (A) |             | Flow  |     |     |     |     |     |     |     |     |     |      | Head Range (m) |
|--------------|-------------|-------|------|------------------|-------------|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|----------------|
| Single-Phase | Three-Phase | kW    | HP   | Single-Phase     | Three-Phase | m³/h  | 0   | 1.2 | 2.4 | 3.6 | 4.8 | 6   | 7.2 | 8.4 | 9.6 | 10.8 |                |
| 220V         | 380V        |       |      | 220V             | 380V        | l/min | 0   | 20  | 40  | 60  | 80  | 100 | 120 | 140 | 160 | 180  |                |
| 4SAm8/5      | -           | 0.55  | 0.75 | 5.2              | -           | H(m)  | 32  | 31  | 28  | 26  | 25  | 23  | 21  | 17  | 13  | 7    | 28~11          |
| 4SAm8/7      | 4SA8/7      | 0.75  | 1    | 6.9              | 2.7         |       | 46  | 44  | 41  | 37  | 35  | 33  | 30  | 26  | 20  | 12   | 41~17          |
| 4SAm8/9      | 4SA8/9      | 1.1   | 1.5  | 9.5              | 3.6         |       | 57  | 56  | 52  | 48  | 45  | 43  | 39  | 34  | 26  | 17   | 52~23          |
| 4SAm8/12     | 4SA8/12     | 1.5   | 2    | 12.2             | 4.8         |       | 77  | 76  | 70  | 65  | 61  | 58  | 53  | 46  | 36  | 23   | 70~32          |
| 4SAm8/18     | 4SA8/18     | 2.2   | 3    | 17.3             | 6.4         |       | 118 | 114 | 106 | 98  | 94  | 88  | 80  | 70  | 54  | 35   | 106~48         |
| -            | 4SA8/24     | 3     | 4    | -                | 10.5        |       | 153 | 149 | 142 | 130 | 122 | 117 | 106 | 91  | 72  | 46   | 142~64         |
| -            | 4SA8/30     | 4     | 5.5  | -                | 12.7        |       | 191 | 187 | 178 | 163 | 153 | 147 | 133 | 114 | 89  | 54   | 178~78         |
| -            | 4SA8/38     | 5.5   | 7.5  | -                | 17.5        |       | 237 | 232 | 221 | 203 | 191 | 181 | 164 | 140 | 106 | 62   | 221~93         |
| -            | 4SA8/46     | 7.5   | 10   | -                | 19.6        |       | 285 | 277 | 264 | 244 | 229 | 217 | 195 | 163 | 123 | 69   | 264~106        |

| Model        |             | Power |     | Rate Current (A) |             | Flow  |     |     |     |     |     |     |      |      |        | Head Range (m) |
|--------------|-------------|-------|-----|------------------|-------------|-------|-----|-----|-----|-----|-----|-----|------|------|--------|----------------|
| Single-Phase | Three-Phase | kW    | HP  | Single-Phase     | Three-Phase | m³/h  | 0   | 1.8 | 3.6 | 5.4 | 7.2 | 9   | 10.8 | 12.6 |        |                |
| 220V         | 380V        |       |     | 220V             | 380V        | l/min | 0   | 30  | 60  | 90  | 120 | 150 | 180  | 210  |        |                |
| 4SAm10/5     | 4SA10/5     | 0.75  | 1   | 6.9              | 2.7         | H(m)  | 31  | 30  | 29  | 27  | 26  | 23  | 18   | 9    | 29~9   |                |
| 4SAm10/7     | 4SA10/7     | 1.1   | 1.5 | 9.5              | 3.6         |       | 43  | 42  | 40  | 39  | 36  | 33  | 27   | 15   | 40~15  |                |
| 4SAm10/10    | 4SA10/10    | 1.5   | 2   | 12.2             | 4.8         |       | 63  | 61  | 58  | 55  | 53  | 46  | 38   | 21   | 59~21  |                |
| 4SAm10/14    | 4SA10/14    | 2.2   | 3   | 17.3             | 6.4         |       | 90  | 89  | 82  | 77  | 74  | 64  | 49   | 26   | 84~26  |                |
| -            | 4SA10/18    | 3     | 4   | -                | 10.5        |       | 113 | 110 | 102 | 99  | 95  | 83  | 66   | 41   | 105~41 |                |
| -            | 4SA10/22    | 4     | 5.5 | -                | 12.7        |       | 136 | 133 | 125 | 121 | 117 | 105 | 84   | 50   | 128~50 |                |
| -            | 4SA10/28    | 5.5   | 7.5 | -                | 17.5        |       | 172 | 168 | 158 | 152 | 146 | 125 | 103  | 62   | 161~62 |                |
| -            | 4SA10/34    | 7.5   | 10  | -                | 19.6        |       | 206 | 202 | 191 | 184 | 175 | 155 | 121  | 72   | 194~72 |                |

| Model        |             | Power |     | Rate Current (A) |             | Flow  |     |     |     |     |     |     |      |      |      |      | Head Range (m) |
|--------------|-------------|-------|-----|------------------|-------------|-------|-----|-----|-----|-----|-----|-----|------|------|------|------|----------------|
| Single-Phase | Three-Phase | kW    | HP  | Single-Phase     | Three-Phase | m³/h  | 0   | 1.8 | 3.6 | 5.4 | 7.2 | 9   | 10.8 | 12.6 | 14.4 | 16.2 |                |
| 220V         | 380V        |       |     | 220V             | 380V        | l/min | 0   | 30  | 60  | 90  | 120 | 150 | 180  | 210  | 240  | 270  |                |
| 4SA12/4      | 4SA12/4     | 0.75  | 1   | 6.9              | 2.7         | H(m)  | 25  | 24  | 23  | 22  | 21  | 19  | 16   | 13   | 10   | 3    | 23~9           |
| 4SA12/6      | 4SA12/6     | 1.1   | 1.5 | 9.5              | 3.6         |       | 38  | 37  | 36  | 35  | 33  | 29  | 25   | 21   | 16   | 6    | 35~16          |
| 4SA12/8      | 4SA12/8     | 1.5   | 2   | 12.2             | 4.8         |       | 53  | 52  | 51  | 47  | 43  | 40  | 34   | 30   | 23   | 9    | 49~21          |
| 4SA12/12     | 4SA12/12    | 2.2   | 3   | 17.3             | 6.4         |       | 78  | 77  | 76  | 70  | 64  | 58  | 51   | 44   | 36   | 14   | 73~35          |
| -            | 4SA12/16    | 3     | 4   | -                | 10.5        |       | 103 | 102 | 98  | 90  | 83  | 75  | 66   | 57   | 45   | 19   | 95~45          |
| -            | 4SA12/20    | 4     | 5.5 | -                | 12.7        |       | 127 | 126 | 124 | 115 | 105 | 96  | 85   | 77   | 58   | 25   | 119~56         |
| -            | 4SA12/26    | 5.5   | 7.5 | -                | 17.5        |       | 165 | 164 | 158 | 147 | 136 | 123 | 109  | 93   | 74   | 33   | 152~69         |
| -            | 4SA12/32    | 7.5   | 10  | -                | 19.6        |       | 202 | 201 | 193 | 178 | 165 | 150 | 135  | 114  | 93   | 43   | 189~88         |


| Model        |             | Power |     | Rate Current (A) |             | Flow  |     |     |     |     |     |     |     |     |        | Head Range (m) |
|--------------|-------------|-------|-----|------------------|-------------|-------|-----|-----|-----|-----|-----|-----|-----|-----|--------|----------------|
| Single-Phase | Three-Phase | kW    | HP  | Single-Phase     | Three-Phase | m³/h  | 0   | 3   | 6   | 9   | 12  | 15  | 18  | 21  |        |                |
| 220V         | 380V        |       |     | 220V             | 380V        | l/min | 0   | 50  | 100 | 150 | 200 | 250 | 300 | 350 |        |                |
| 4SA16/4      | 4SA16/4     | 1.1   | 1.5 | 9.5              | 3.6         | H(m)  | 25  | 24  | 21  | 19  | 15  | 12  | 7   | -   | 23~3   |                |
| 4SA16/6      | 4SA16/6     | 1.5   | 2   | 12.2             | 4.8         |       | 37  | 35  | 32  | 29  | 25  | 20  | 13  | 3   | 34~8   |                |
| 4SA16/9      | 4SA16/9     | 2.2   | 3   | 17.3             | 6.4         |       | 53  | 51  | 47  | 42  | 36  | 29  | 19  | 5   | 49~13  |                |
| -            | 4SA16/12    | 3     | 4   | -                | 10.5        |       | 72  | 70  | 67  | 60  | 51  | 44  | 29  | 8   | 68~19  |                |
| -            | 4SA16/16    | 4     | 5.5 | -                | 12.7        |       | 96  | 93  | 88  | 80  | 69  | 58  | 39  | 10  | 91~25  |                |
| -            | 4SA16/20    | 5.5   | 7.5 | -                | 17.5        |       | 120 | 117 | 110 | 100 | 86  | 72  | 49  | 12  | 114~32 |                |
| -            | 4SA16/24    | 7.5   | 10  | -                | 19.6        |       | 145 | 140 | 132 | 119 | 103 | 87  | 59  | 15  | 136~38 |                |

## Components & Materials

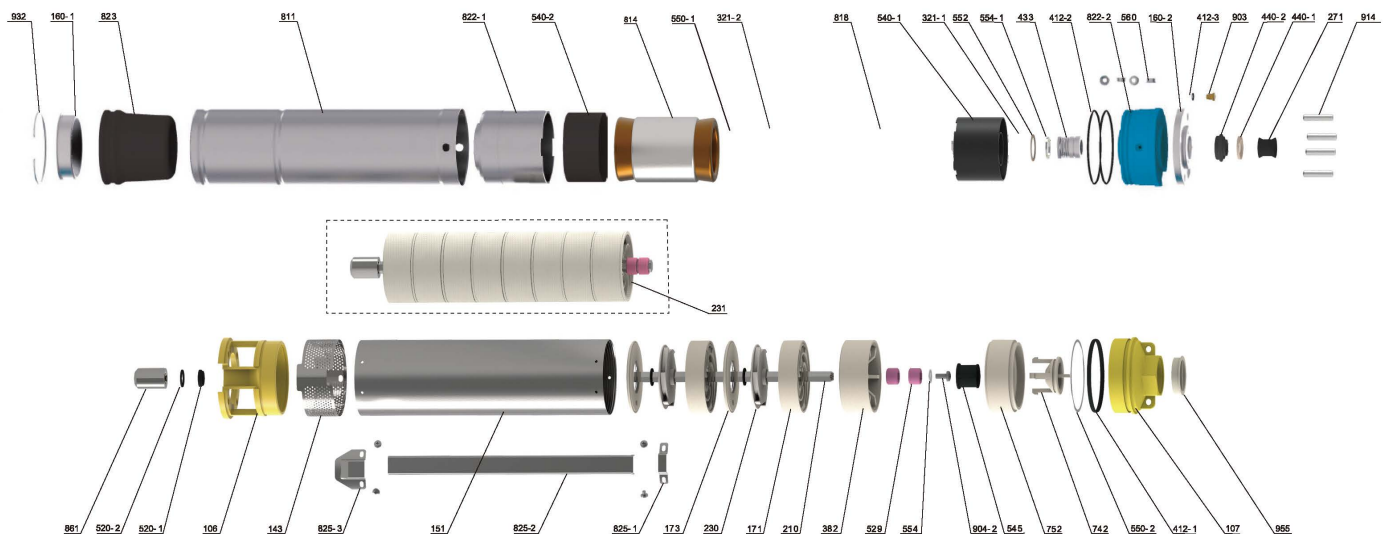


| No.   | Part name                | No.   | Part name             | No.   | Part name                |
|-------|--------------------------|-------|-----------------------|-------|--------------------------|
| 106   | Inlet joint              | 412-2 | O-ring                | 742   | Bonnet                   |
| 107   | Delivery chamber         | 412-3 | O-ring                | 811   | Casing                   |
| 143   | Net cover                | 433   | Mechanical seal       | 814   | Stator core with winding |
| 151   | Sleeve                   | 440-1 | Anti-sand pad         | 818   | Rotor                    |
| 160-1 | Bottom cover             | 440-2 | Anti-sand seat        | 822-1 | Lower bearing block      |
| 160-2 | Cover plate              | 520-1 | Spacer bush           | 822-2 | Oil chamber              |
| 171   | Guide vane               | 520-2 | Spacer bush           | 823   | Pressure regulating film |
| 173   | Guide vane cover plate   | 529   | Shaft sleeve          | 825-1 | Small pressing plate     |
| 210   | Pump shaft               | 540-1 | Upper spacer sleeve   | 825-2 | Cable pressing plate     |
| 230   | Impeller                 | 540-2 | Lower spacer sleeve   | 861   | Coupling                 |
| 231   | Impellerstring           | 545   | Middle rubber bearing | 903   | Vent cock                |
| 271   | Sand shaking sleeve      | 550-1 | Adjusting washer      | 914   | Hexagon socket set screw |
| 321-1 | Deep groove ball bearing | 550-2 | Adjusting washer      | 932   | Retaining ring           |
| 321-2 | Angular contact bearing  | 552   | Wave spring           | 955   | Dust cover               |
| 382   | Middle bearing block     | 554   | Flat washer           |       |                          |
| 412-1 | O-ring                   | 560   | Locating pin          |       |                          |

## Dimensions & Weight

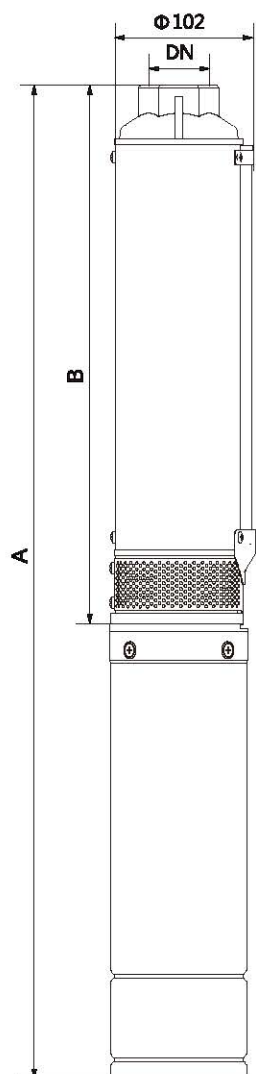

| Model        |             | Pipe Connection (DN) | Dim. (mm) |                |               | N.W.(kg) |              |             |
|--------------|-------------|----------------------|-----------|----------------|---------------|----------|--------------|-------------|
| Single-phase | Three-phase |                      | B         | A Single-Phase | A Three-phase | Body(kg) | Motor(kg)    |             |
|              |             |                      |           |                |               |          | Single-phase | Three-phase |
| 4SAm2/8      | -           | G1¼<br>1¼            | 391       | 715            | -             | 3.2      | 9.0          | -           |
| 4SAm2/11     | -           |                      | 465       | 809            | -             | 3.8      | 9.8          | -           |
| 4SAm2/16     | 4SA2/16     |                      | 590       | 959            | 1007          | 5.0      | 11.0         | 9.3         |
| 4SAm2/22     | 4SA2/22     |                      | 774       | 1178           | 1226          | 6.2      | 13.0         | 11.4        |
| 4SAm2/28     | 4SA2/28     |                      | 958       | 1407           | 1420          | 7.4      | 15.0         | 12.0        |
| 4SAm2/38     | 4SA2/38     |                      | 1206      | 1715           | 1723          | 9.2      | 20.5         | 14.5        |
| -            | 4SA2/50     |                      | 1540      | -              | 2155          | 12.1     | -            | 18.5        |
| -            | 4SA2/62     |                      | 1873      | -              | 2568          | 13.8     | -            | 21.5        |

| Model        |             | Pipe Connection (DN) | Dim. (mm) |                |               | N.W.(kg) |              |             |
|--------------|-------------|----------------------|-----------|----------------|---------------|----------|--------------|-------------|
| Single-phase | Three-phase |                      | B         | A Single-Phase | A Three-phase | Body(kg) | Motor(kg)    |             |
|              |             |                      |           |                |               |          | Single-phase | Three-phase |
| 4SAm3/7      | -           | G1¼<br>1¼            | 379       | 703            | -             | 3.0      | 9.0          | -           |
| 4SAm3/9      | -           |                      | 431       | 775            | -             | 3.4      | 9.8          | -           |
| 4SAm3/13     | 4SA3/13     |                      | 536       | 905            | 963           | 4.2      | 11.0         | 9.3         |
| 4SAm3/17     | 4SA3/17     |                      | 640       | 1044           | 1107          | 5.0      | 13.0         | 11.4        |
| 4SAm3/21     | 4SA3/21     |                      | 814       | 1263           | 1301          | 6.0      | 15.0         | 12.0        |
| 4SAm3/30     | 4SA3/30     |                      | 1049      | 1587           | 1585          | 8.0      | 20.5         | 14.5        |
| -            | 4SA3/40     |                      | 1344      | -              | 1959          | 10.4     | -            | 18.5        |
| -            | 4SA3/50     |                      | 1605      | -              | 2299          | 12.6     | -            | 21.5        |
| -            | 4SA3/60     |                      | 1900      | -              | 2660          | 14.8     | -            | 25.5        |

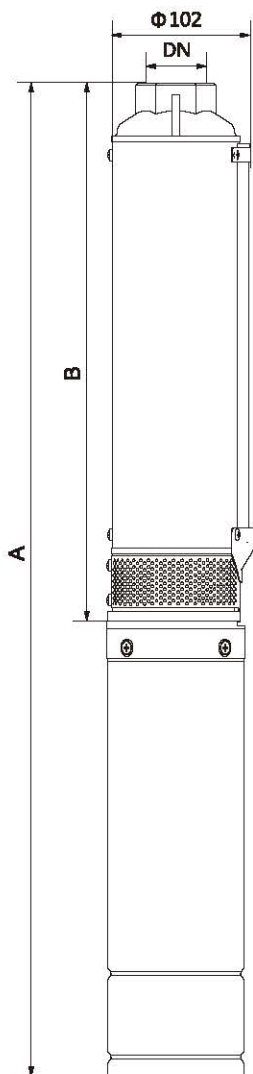


| Model            |                 | Pipe<br>Connction<br>(DN) | Dim. (mm) |              |             | N.W.(kg) |              |             |
|------------------|-----------------|---------------------------|-----------|--------------|-------------|----------|--------------|-------------|
| Single-<br>phase | Three-<br>phase |                           | B         | A            | A           | Body(kg) | Motor(kg)    |             |
|                  |                 |                           |           | Single-Phase | Three-phase |          | Single-phase | Three-phase |
| 4SAm4/6          | -               | G1¼<br>1¼                 | 367       | 691          | -           | 3.0      | 9.0          | -           |
| 4SAm4/7          | -               |                           | 396       | 740          | -           | 3.2      | 9.8          | -           |
| 4SAm4/10         | 4SA4/10         |                           | 483       | 851          | 900         | 3.8      | 11.0         | 9.3         |
| 4SAm4/14         | 4SA4/14         |                           | 599       | 1003         | 1051        | 4.7      | 13.0         | 11.4        |
| 4SAm4/18         | 4SA4/18         |                           | 785       | 1234         | 1247        | 5.7      | 15.0         | 12.0        |
| 4SAm4/24         | 4SA4/24         |                           | 959       | 1468         | 1476        | 7.1      | 20.5         | 14.5        |
| -                | 4SA4/32         |                           | 1227      | -            | 1842        | 9.2      | -            | 18.5        |
| -                | 4SA4/40         |                           | 1459      | -            | 2154        | 11.2     | -            | 21.5        |
| -                | 4SA4/50         |                           | 1785      | -            | 2545        | 13.3     | -            | 25.5        |
| -                | 4SA4/60         |                           | 2075      | -            | 2950        | 14.8     | -            | 31.5        |

| Model            |                 | Pipe<br>Connction<br>(DN) | Dim. (mm) |                   |                  | N.W.(kg) |              |             |
|------------------|-----------------|---------------------------|-----------|-------------------|------------------|----------|--------------|-------------|
| Single-<br>phase | Three-<br>phase |                           | B         | A<br>Single-Phase | A<br>Three-phase | Body(kg) | Motor(kg)    |             |
|                  |                 |                           |           |                   |                  |          | Single-phase | Three-phase |
| 4SAm6/5          | -               | G1½<br>1½                 | 352       | 676               | -                | 2.7      | 9.0          | -           |
| 4SAm6/6          | -               |                           | 384       | 728               | -                | 3.0      | 9.8          | -           |
| 4SAm6/8          | 4SA6/8          |                           | 450       | 819               | 867              | 3.5      | 11.0         | 9.3         |
| 4SAm6/11         | 4SA6/11         |                           | 549       | 953               | 1001             | 4.1      | 13.0         | 11.4        |
| 4SAm6/14         | 4SA6/14         |                           | 683       | 1132              | 1145             | 5.0      | 15.0         | 12.0        |
| 4SAm6/20         | 4SA6/20         |                           | 914       | 1423              | 1431             | 6.6      | 20.5         | 14.5        |
| -                | 4SA6/26         |                           | 1111      | -                 | 1726             | 7.9      | -            | 18.5        |
| -                | 4SA6/34         |                           | 1407      | -                 | 2102             | 10.1     | -            | 21.5        |
| -                | 4SA6/42         |                           | 1670      | -                 | 2430             | 12.0     | -            | 25.5        |
| -                | 4SA6/50         |                           | 1969      | -                 | 2844             | 14.0     | -            | 31.5        |

| Model            |                 | Pipe<br>Connction<br>(DN) | Dim. (mm) |              |             | N.W.(kg) |              |             |
|------------------|-----------------|---------------------------|-----------|--------------|-------------|----------|--------------|-------------|
| Single-<br>phase | Three-<br>phase |                           | B         | A            | A           | Body(kg) | Motor(kg)    |             |
|                  |                 |                           |           | Single-Phase | Three-phase |          | Single-phase | Three-phase |
| 4SAm8/5          | -               | G2<br>2                   | 387       | 731          | -           | 3.1      | 9.0          | -           |
| 4SAm8/7          | 4SA8/7          |                           | 463       | 832          | 890         | 3.7      | 11.0         | 9.3         |
| 4SAm8/9          | 4SA8/9          |                           | 539       | 943          | 1006        | 4.2      | 13.0         | 11.4        |
| 4SAm8/12         | 4SA8/12         |                           | 689       | 1138         | 1176        | 5.0      | 15.0         | 12.0        |
| 4SAm8/18         | 4SA8/18         |                           | 952       | 1491         | 1489        | 7.0      | 20.5         | 14.5        |
| -                | 4SA8/24         |                           | 1180      | -            | 1795        | 8.7      | -            | 18.5        |
| -                | 4SA8/30         |                           | 1444      | -            | 2138        | 10.5     | -            | 21.5        |
| -                | 4SA8/38         |                           | 1783      | -            | 2543        | 12.9     | -            | 25.5        |
| -                | 4SA8/46         |                           | 2087      | -            | 2962        | 15.3     | -            | 31.5        |



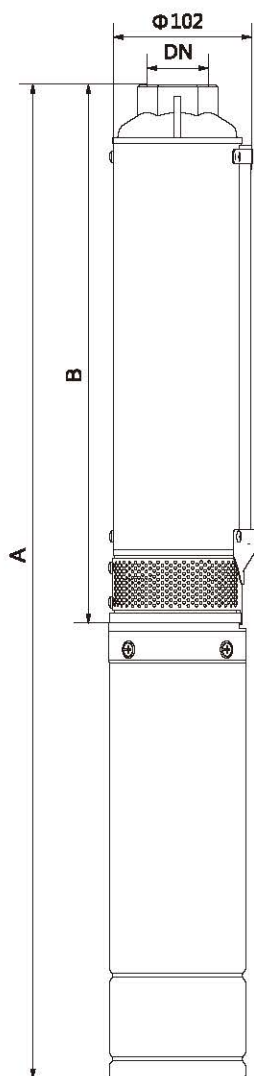

| Model        |             | Pipe Connection (DN) | Dim. (mm) |                |               | N.W.(kg) |              |             |
|--------------|-------------|----------------------|-----------|----------------|---------------|----------|--------------|-------------|
| Single-phase | Three-phase |                      | B         | A Single-Phase | A Three-phase | Body(kg) | Motor(kg)    |             |
|              |             |                      |           |                |               |          | Single-phase | Three-phase |
| 4SAm10/5     | 4SA10/5     | G2 2                 | 387       | 756            | 814           | 3.1      | 11.0         | 9.3         |
| 4SAm10/7     | 4SA10/7     |                      | 463       | 867            | 930           | 3.6      | 13.0         | 11.4        |
| 4SAm10/10    | 4SA10/10    |                      | 613       | 1061           | 1099          | 4.5      | 15.0         | 12          |
| 4SAm10/14    | 4SA10/14    |                      | 800       | 1339           | 1337          | 5.8      | 20.5         | 14.5        |
| -            | 4SA10/18    |                      | 952       | -              | 1567          | 6.8      | -            | 18.5        |
| -            | 4SA10/22    |                      | 1104      | -              | 1799          | 8.0      | -            | 21.5        |
| -            | 4SA10/28    |                      | 1367      | -              | 2127          | 9.3      | -            | 25.5        |
| -            | 4SA10/34    |                      | 1596      | -              | 2471          | 10.7     | -            | 31.5        |

| Model        |             | Pipe Connection (DN) | Dim. (mm) |                |               | N.W.(kg) |              |             |
|--------------|-------------|----------------------|-----------|----------------|---------------|----------|--------------|-------------|
| Single-phase | Three-phase |                      | B         | A Single-Phase | A Three-phase | Body(kg) | Motor(kg)    |             |
|              |             |                      |           |                |               |          | Single-phase | Three-phase |
| 4SAm12/4     | 4SA12/4     | G2 2                 | 438       | 807            | 855           | 3.6      | 11.0         | 9.3         |
| 4SAm12/6     | 4SA12/6     |                      | 536       | 940            | 988           | 4.4      | 13.0         | 11.4        |
| 4SAm12/8     | 4SA12/8     |                      | 633       | 1082           | 1095          | 5.2      | 15.0         | 12.0        |
| 4SAm12/12    | 4SA12/12    |                      | 884       | 1393           | 1401          | 7.1      | 20.5         | 14.5        |
| -            | 4SA12/16    |                      | 1078      | -              | 1693          | 8.7      | -            | 18.5        |
| -            | 4SA12/20    |                      | 1329      | -              | 2024          | 10.6     | -            | 21.5        |
| -            | 4SA12/26    |                      | 1621      | -              | 2381          | 13.7     | -            | 25.5        |
| -            | 4SA12/32    |                      | 1969      | -              | 2844          | 16.4     | -            | 31.5        |

| Model        |             | Pipe Connection (DN) | Dim. (mm) |                |               | N.W.(kg) |              |             |
|--------------|-------------|----------------------|-----------|----------------|---------------|----------|--------------|-------------|
| Single-phase | Three-phase |                      | B         | A Single-Phase | A Three-phase | Body(kg) | Motor(kg)    |             |
|              |             |                      |           |                |               |          | Single-phase | Three-phase |
| 4SAm16/4     | 4SA16/4     | G2 2                 | 550       | 955            | 1018          | 4.1      | 13.0         | 11.4        |
| 4SAm16/6     | 4SA16/6     |                      | 702       | 1151           | 1189          | 5.3      | 15.0         | 12          |
| 4SAm16/9     | 4SA16/9     |                      | 929       | 1469           | 1467          | 6.8      | 20.5         | 14.5        |
| -            | 4SA16/12    |                      | 1157      | -              | 1772          | 8.3      | -            | 18.5        |
| -            | 4SA16/16    |                      | 1460      | -              | 2155          | 10.4     | -            | 21.5        |
| -            | 4SA16/20    |                      | 1763      | -              | 2523          | 12.5     | -            | 25.5        |
| -            | 4SA16/24    |                      | 2066      | -              | 2942          | 14.5     | -            | 31.5        |

## Packing Size & Weight

| Model        |             | Dim. (mm)    |             |              |              |              | G.W.(kg)      |               | 20"Loading Qty.(pcs) |             |
|--------------|-------------|--------------|-------------|--------------|--------------|--------------|---------------|---------------|----------------------|-------------|
| Single-phase | Three-phase | Motor(L×W×H) |             | Body (L×W×H) | Pump(L×W×H)  |              | Single-phase  | Three-phase   | Single-phase         | Three-phase |
|              |             | Single-phase | Three-phase |              | Single-phase | Three-phase  |               |               |                      |             |
| 4SAm2/8      | -           | -            | -           | -            | 1020×110×185 | -            | 13.7          | -             | 1300                 | -           |
| 4SAm2/11     | -           | -            | -           | -            | 1100×110×185 | -            | 15.1          | -             | 1170                 | -           |
| 4SAm2/16     | 4SA2/16     | -            | -           | -            | 1280×110×185 | 1130×110×185 | 17.5          | 15.8          | 1030                 | 1230        |
| 4SAm2/22     | 4SA2/22     | -            | -           | -            | 1500×110×185 | 1310×110×185 | 20.7          | 19.1          | 870                  | 1000        |
| 4SAm2/28     | 4SA2/28     | 770×125×225  | 645×125×125 | 1075×125×125 | -            | -            | M:17 B:8.4    | M:14B:8.4     | 680                  | 1030        |
| 4SAm2/38     | 4SA2/38     | 870×125×225  | 690×125×125 | 1310×125×125 | -            | -            | M:22.5 B:10.2 | M:16.5 B:10.2 | 560                  | 840         |
| -            | 4SA2/50     | -            | 780×125×125 | 1680×125×125 | -            | -            | -             | M:20.5 B:14.1 | -                    | 700         |
| -            | 4SA2/62     | -            | 825×125×125 | 1980×125×125 | -            | -            | -             | M:23.5 B:16   | -                    | 590         |

| Model        |             | Dim. (mm)    |             |              |              |              | G.W.(kg)     |               | 20"Loading Qty.(pcs) |             |
|--------------|-------------|--------------|-------------|--------------|--------------|--------------|--------------|---------------|----------------------|-------------|
| Single-phase | Three-phase | Motor(L×W×H) |             | Body (L×W×H) | Pump(L×W×H)  |              | Single-phase | Three-phase   | Single-phase         | Three-phase |
|              |             | Single-phase | Three-phase |              | Single-phase | Three-phase  |              |               |                      |             |
| 4SAm3/7      | -           | -            | -           | -            | 1020×110×185 | -            | 13.5         | -             | 1300                 | -           |
| 4SAm3/9      | -           | -            | -           | -            | 1075×110×185 | -            | 14.7         | -             | 1230                 | -           |
| 4SAm3/13     | 4SA3/13     | -            | -           | -            | 1220×110×185 | 1075×110×185 | 16.7         | 15.0          | 1080                 | 1300        |
| 4SAm3/17     | 4SA3/17     | -            | -           | -            | 1360×110×185 | 1220×110×185 | 19.5         | 17.9          | 960                  | 1150        |
| 4SAm3/21     | 4SA3/21     | 770×125×225  | 645×125×125 | 935×125×125  | -            | -            | M:17 B:7.5   | M:14B:7.5     | 720                  | 1130        |
| 4SAm3/30     | 4SA3/30     | 880×125×225  | 690×125×125 | 1180×125×125 | -            | -            | M:22.5 B:9.5 | M:16.5 B:9.5  | 600                  | 930         |
| -            | 4SA3/40     | -            | 780×125×125 | 1460×125×125 | -            | -            | -            | M:20.5 B:11.9 | -                    | 780         |
| -            | 4SA3/50     | -            | 825×125×125 | 1735×125×125 | -            | -            | -            | M:23.5 B:14.6 | -                    | 660         |
| -            | 4SA3/60     | -            | 920×125×125 | 2015×125×125 | -            | -            | -            | M:27.5 B:16.8 | -                    | 570         |

| Model        |             | Dim. (mm)    |              |              |              |              | G.W.(kg)     |               | 20"Loading Qty.(pcs) |             |
|--------------|-------------|--------------|--------------|--------------|--------------|--------------|--------------|---------------|----------------------|-------------|
| Single-phase | Three-phase | Motor(L×W×H) |              | Body (L×W×H) | Pump(L×W×H)  |              | Single-phase | Three-phase   | Single-phase         | Three-phase |
|              |             | Single-phase | Three-phase  |              | Single-phase | Three-phase  |              |               |                      |             |
| 4SAm4/6      | -           | -            | -            | -            | 1020×110×185 | -            | 13.5         | -             | 1300                 | -           |
| 4SAm4/7      | -           | -            | -            | -            | 1075×110×185 | -            | 14.5         | -             | 1230                 | -           |
| 4SAm4/10     | 4SA4/10     | -            | -            | -            | 1150×110×185 | 980×110×185  | 16.3         | 14.6          | 1120                 | 1350        |
| 4SAm4/14     | 4SA4/14     | -            | -            | -            | 1310×110×185 | 1130×110×185 | 19.2         | 17.6          | 1000                 | 1170        |
| 4SAm4/18     | 4SA4/18     | 770×125×225  | 645×125×125  | 890×125×125  | -            | -            | M:17 B:7.2   | M:14B:7.2     | 740                  | 1160        |
| 4SAm4/24     | 4SA4/24     | 880×125×225  | 690×125×125  | 1075×125×125 | -            | -            | M:22.5 B:8.6 | M:16.5 B:8.6  | 630                  | 990         |
| -            | 4SA4/32     | -            | 780×125×125  | 1360×125×125 | -            | -            | -            | M:20.5 B:10.7 | -                    | 820         |
| -            | 4SA4/40     | -            | 825×125×125  | 1550×125×125 | -            | -            | -            | M:23.5 B:13.2 | -                    | 720         |
| -            | 4SA4/50     | -            | 920×125×125  | 1910×125×125 | -            | -            | -            | M:27.5 B:15.3 | -                    | 600         |
| -            | 4SA4/60     | -            | 1040×125×125 | 2200×125×125 | -            | -            | -            | M:33.5 B:16.8 | -                    | 510         |

| Model        |             | Dim. (mm)    |              |              |              |              | G.W.(kg)     |               | 20"Loading Qty.(pcs) |             |
|--------------|-------------|--------------|--------------|--------------|--------------|--------------|--------------|---------------|----------------------|-------------|
| Single-phase | Three-phase | Motor(L×W×H) |              | Body (L×W×H) | Pump(L×W×H)  |              | Single-phase | Three-phase   | Single-phase         | Three-phase |
|              |             | Single-phase | Three-phase  |              | Single-phase | Three-phase  |              |               |                      |             |
| 4SAm6/5      | -           | -            | -            | -            | 980×110×185  | -            | 13.2         | -             | 1350                 | -           |
| 4SAm6/6      | -           | -            | -            | -            | 1020×110×185 | -            | 14.3         | -             | 1300                 | -           |
| 4SAm6/8      | 4SA6/8      | -            | -            | -            | 1130×110×185 | 955×110×185  | 16.0         | 14.3          | 1170                 | 1420        |
| 4SAm6/11     | 4SA6/11     | -            | -            | -            | 1280×110×185 | 1100×110×185 | 18.6         | 17            | 1050                 | 1230        |
| 4SAm6/14     | 4SA6/14     | 770×125×225  | 645×125×125  | 770×125×125  | -            | -            | M:17 B:6     | M:14 B:6      | 780                  | 1270        |
| 4SAm6/20     | 4SA6/20     | 880×125×225  | 690×125×125  | 1020×125×125 | -            | -            | M:22.5 B:8.1 | M:16.5 B:8.1  | 650                  | 1050        |
| -            | 4SA6/26     | -            | 780×125×125  | 1210×125×125 | -            | -            | -            | M:20.5 B:9.4  | -                    | 900         |
| -            | 4SA6/34     | -            | 825×125×125  | 1500×125×125 | -            | -            | -            | M:23.5 B:12.1 | -                    | 750         |
| -            | 4SA6/42     | -            | 920×125×125  | 1800×125×125 | -            | -            | -            | M:27.5 B:14   | -                    | 650         |
| -            | 4SA6/50     | -            | 1040×125×125 | 2060×125×125 | -            | -            | -            | M:33.5 B:16   | -                    | 560         |

| Model        |             | Dim. (mm)    |              |              |              |              | G.W.(kg)     |               | 20"Loading Qty.(pcs) |             |
|--------------|-------------|--------------|--------------|--------------|--------------|--------------|--------------|---------------|----------------------|-------------|
| Single-phase | Three-phase | Motor(L×W×H) |              | Body (L×W×H) | Pump(L×W×H)  |              | Single-phase | Three-phase   | Single-phase         | Three-phase |
|              |             | Single-phase | Three-phase  |              | Single-phase | Three-phase  |              |               |                      |             |
| 4SAm8/5      | -           | -            | -            | -            | 1020×110×185 | -            | 14.4         | -             | 1300                 | -           |
| 4SAm8/7      | 4SA8/7      | -            | -            | -            | 1130×110×185 | 980×110×185  | 16.2         | 14.5          | 1170                 | 1420        |
| 4SAm8/9      | 4SA8/9      | -            | -            | -            | 1255×110×185 | 1130×110×185 | 18.7         | 17.1          | 1050                 | 1230        |
| 4SAm8/12     | 4SA8/12     | 770×125×225  | 645×125×125  | 810×125×125  | -            | -            | M:17 B:6     | M:14 B:6      | 770                  | 1230        |
| 4SAm8/18     | 4SA8/18     | 880×125×225  | 690×125×125  | 1075×125×125 | -            | -            | M:22.5 B:8   | M:16.5 B:8    | 630                  | 1000        |
| -            | 4SA8/24     | -            | 780×125×125  | 1310×125×125 | -            | -            | -            | M:20.5 B:10.2 | -                    | 840         |
| -            | 4SA8/30     | -            | 825×125×125  | 1550×125×125 | -            | -            | -            | M:23.5 B:12   | -                    | 720         |
| -            | 4SA8/38     | -            | 920×125×125  | 1910×125×125 | -            | -            | -            | M:27.5 B:14.9 | -                    | 600         |
| -            | 4SA8/46     | -            | 1040×125×125 | 2200×125×125 | -            | -            | -            | M:33.5 B:17.3 | -                    | 510         |

| Model        |             | Dim. (mm)    |              |              |              |              | G.W.(kg)     |               | 20"Loading Qty.(pcs) |             |
|--------------|-------------|--------------|--------------|--------------|--------------|--------------|--------------|---------------|----------------------|-------------|
| Single-phase | Three-phase | Motor(L×W×H) |              | Body (L×W×H) | Pump(L×W×H)  |              | Single-phase | Three-phase   | Single-phase         | Three-phase |
|              |             | Single-phase | Three-phase  |              | Single-phase | Three-phase  |              |               |                      |             |
| 4SAm10/5     | 4SA10/5     | -            | -            | -            | 1075×110×185 | 955×110×185  | 17.8         | 13.9          | 1230                 | 1500        |
| 4SAm10/7     | 4SA10/7     | -            | -            | -            | 1180×110×185 | 1020×110×185 | M:17 B:4.8   | 16.5          | 1120                 | 1350        |
| 4SAm10/10    | 4SA10/10    | 770×125×225  | 645×125×125  | 730×125×125  | -            | -            | M:22.5 B:6.1 | M:14 B:5.5    | 800                  | 1310        |
| 4SAm10/14    | 4SA10/14    | 880×125×225  | 690×125×125  | 890×125×125  | -            | -            | -            | M:16.5 B:6.7  | 680                  | 1120        |
| -            | 4SA10/18    | -            | 780×125×125  | 1075×125×125 | -            | -            | -            | M:20.5 B:8.3  | -                    | 960         |
| -            | 4SA10/22    | -            | 825×125×125  | 1210×125×125 | -            | -            | -            | M:23.5 B:9.5  | -                    | 850         |
| -            | 4SA10/28    | -            | 920×125×125  | 1460×125×125 | -            | -            | -            | M:27.5 B:10.8 | -                    | 720         |
| -            | 4SA10/34    | -            | 1040×125×125 | 1680×125×125 | -            | -            | -            | M:33.5 B:12.7 | -                    | 630         |

| Model        |             | Dim. (mm)    |              |              |              |              | G.W.(kg)     |               | 20"Loading Qty.(pcs) |             |
|--------------|-------------|--------------|--------------|--------------|--------------|--------------|--------------|---------------|----------------------|-------------|
| Single-phase | Three-phase | Motor(LxWxH) |              | Body (LxWxH) | Pump(LxWxH)  |              | Single-phase | Three-phase   | Single-phase         | Three-phase |
|              |             | Single-phase | Three-phase  |              | Single-phase | Three-phase  |              |               |                      |             |
| 4SA12/4      | 4SA12/4     | -            | -            | -            | 1100x110x185 | 935x110x185  | 16.1         | 14.4          | 1170                 | 1420        |
| 4SA12/6      | 4SA12/6     | -            | -            | -            | 1255x110x185 | 1075x110x185 | 18.9         | 17.3          | 1050                 | 1230        |
| 4SA12/8      | 4SA12/8     | 770x125x225  | 645x125x125  | 730x125x125  | -            | -            | M:17 B:6.2   | M:14 B:6.2    | 1150                 | 1310        |
| 4SA12/12     | 4SA12/12    | 880x125x225  | 690x125x225  | 1020x125x125 | -            | -            | M:22.5 B:8.1 | M:16.5 B:8.1  | 900                  | 1030        |
| -            | 4SA12/16    | -            | 780x125x225  | 1180x125x125 | -            | -            | -            | M:20.5 B:10.2 | -                    | 900         |
| -            | 4SA12/20    | -            | 825x125x225  | 1460x125x125 | -            | -            | -            | M:23.5 B:12.1 | -                    | 750         |
| -            | 4SA12/26    | -            | 920x125x225  | 1735x125x125 | -            | -            | -            | M:27.5 B:15.7 | -                    | 640         |
| -            | 4SA12/32    | -            | 1040x125x125 | 2060x125x125 | -            | -            | -            | M:33.5 B:18.4 | -                    | 540         |

| Model        |             | Dim. (mm)    |             |              |              |              | G.W.(kg)     |               | 20"Loading Qty.(pcs) |             |
|--------------|-------------|--------------|-------------|--------------|--------------|--------------|--------------|---------------|----------------------|-------------|
| Single-phase | Three-phase | Motor(LxWxH) |             | Body (LxWxH) | Pump(LxWxH)  |              | Single-phase | Three-phase   | Single-phase         | Three-phase |
|              |             | Single-phase | Three-phase |              | Single-phase | Three-phase  |              |               |                      |             |
| 4SA16/4      | 4SA16/4     | -            | -           | -            | 1255x110x185 | 1075x110x185 | 18.6         | 17            | 1050                 | 1230        |
| 4SA16/6      | 4SA16/6     | 770x125x225  | 590x125x125 | 810x125x125  | -            | -            | M:17 B:5.1   | M:17.7 B:6.3  | 1080                 | 1230        |
| 4SA16/9      | 4SA16/9     | 880x125x225  | 645x125x125 | 1020x125x125 | -            | -            | M:27.7 B:6.8 | M:21.7 B:7.8  | 900                  | 1030        |
| -            | 4SA16/12    | -            | 700x125x125 | 1255x125x125 | -            | -            | -            | M:27.2 B:9.8  | -                    | 870         |
| -            | 4SA16/16    | -            | 780x125x125 | 1550x125x125 | -            | -            | -            | M:31.7 B:11.9 | -                    | 720         |
| -            | 4SA16/20    | -            | 870x125x125 | 1855x125x125 | -            | -            | -            | M:37.8 B:14.5 | -                    | 610         |
| -            | 4SA16/24    | -            | 975x125x125 | 2150x125x125 | -            | -            | -            | M:46.8 B:16.5 | -                    | 520         |

NOTE: Motor packaged without submersible drop cable, package dimensions enlarged if necessary.

