

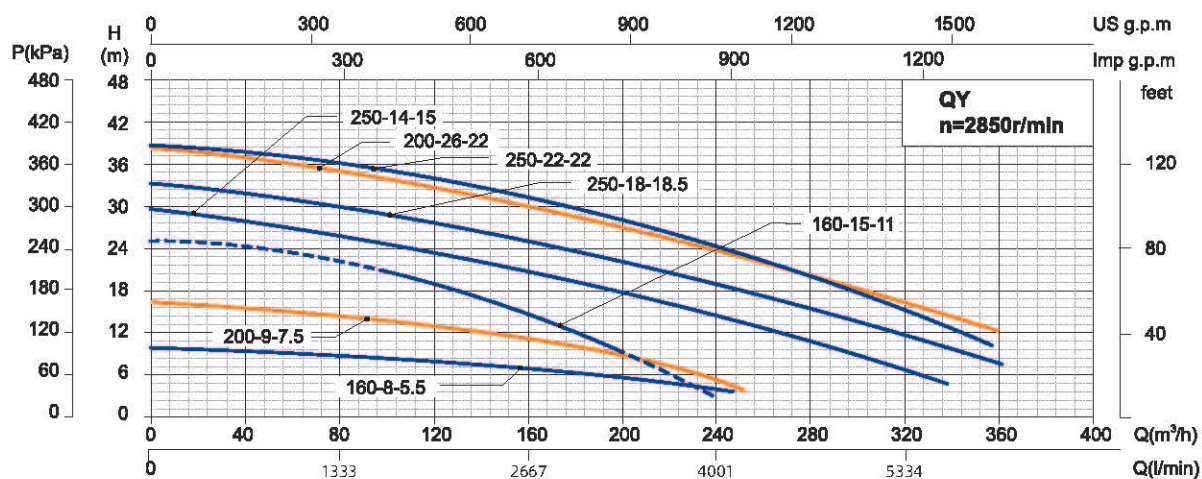
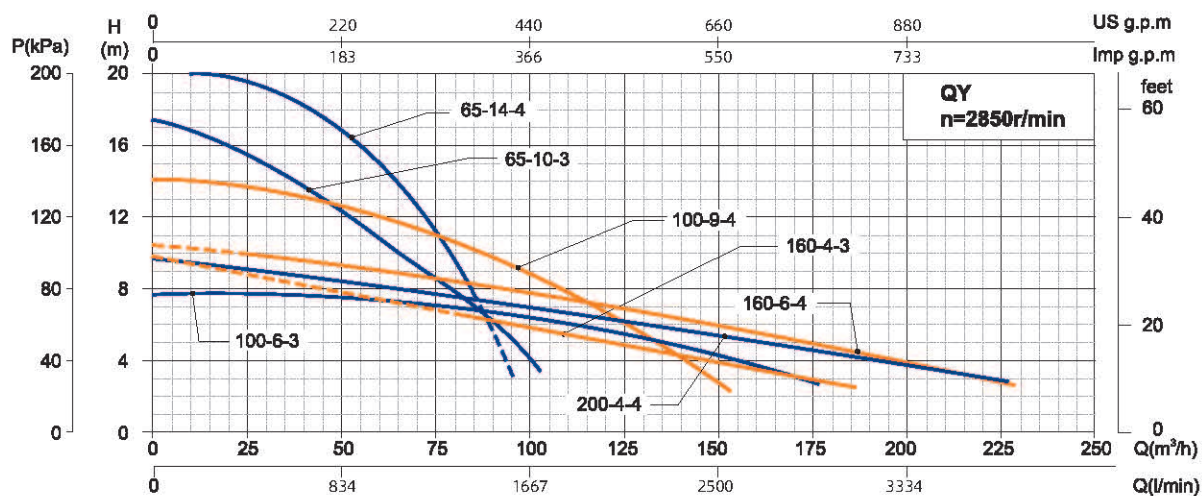
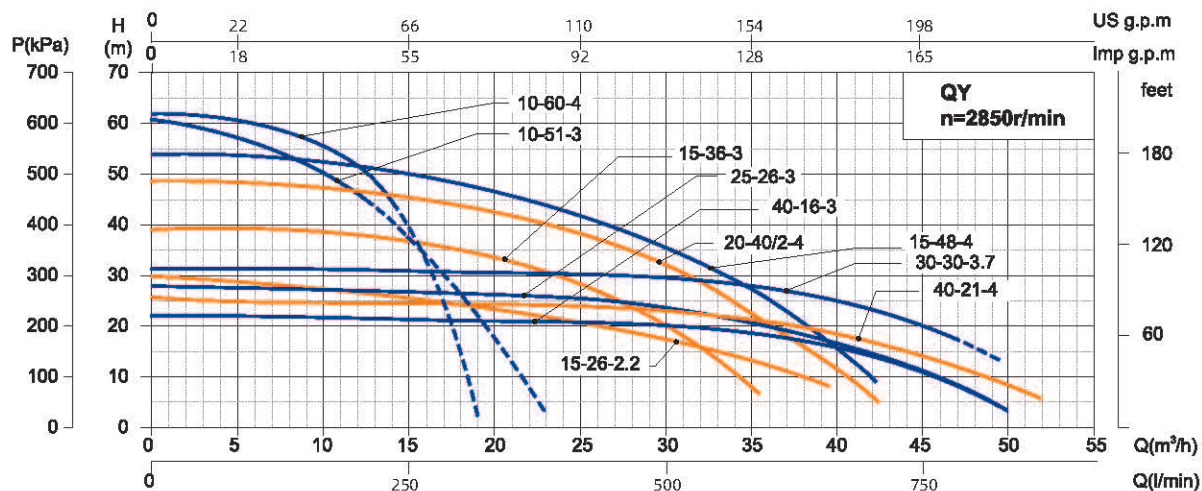
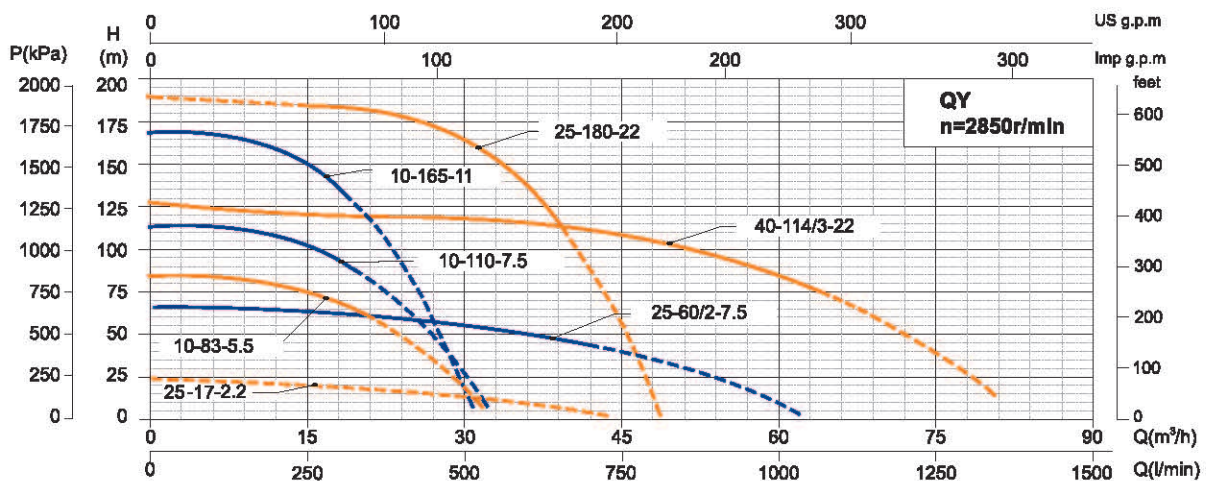






Performance Curve

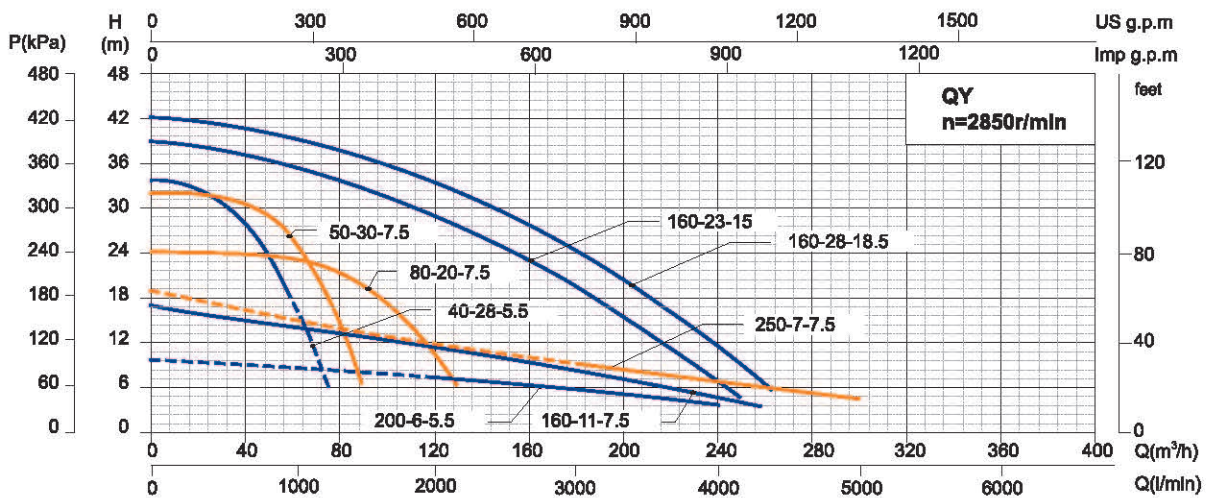

Performance Curve

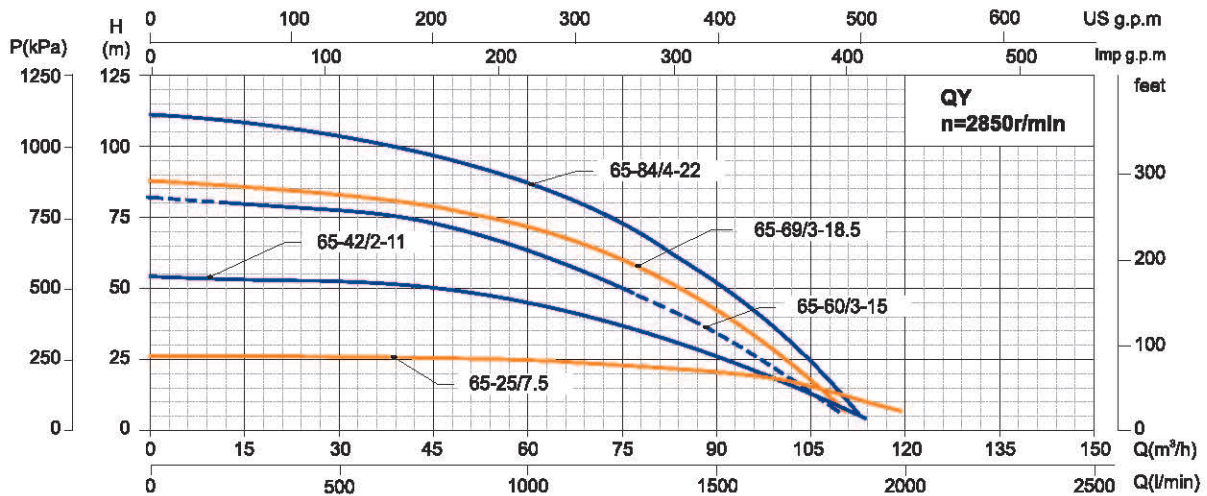

Performance Curve

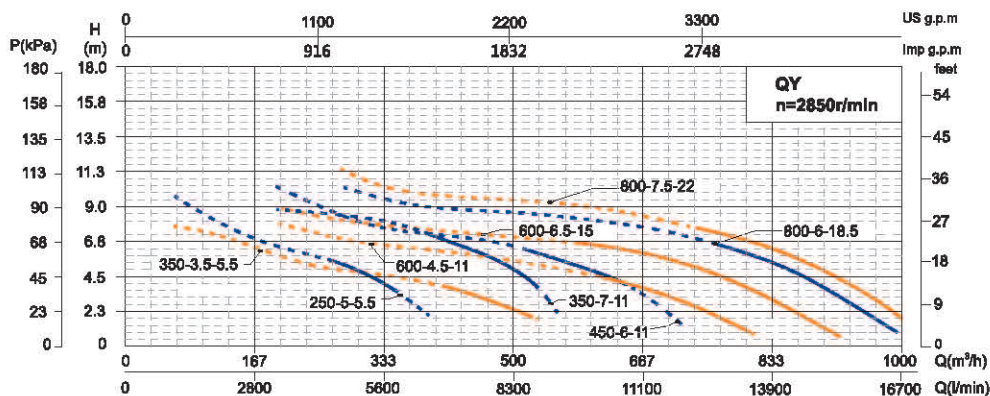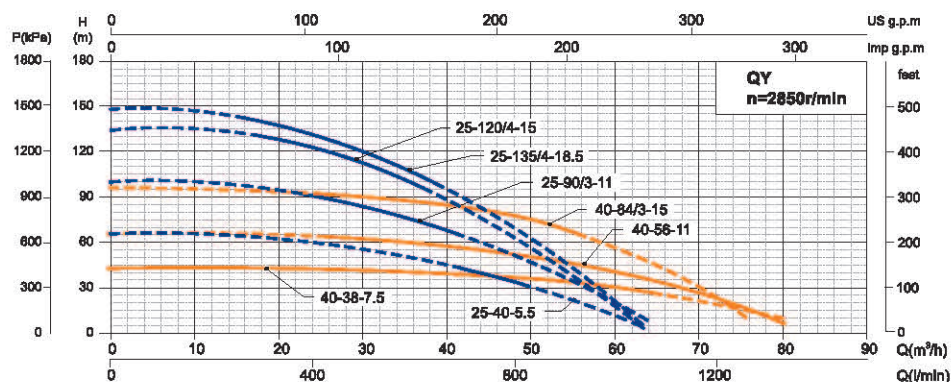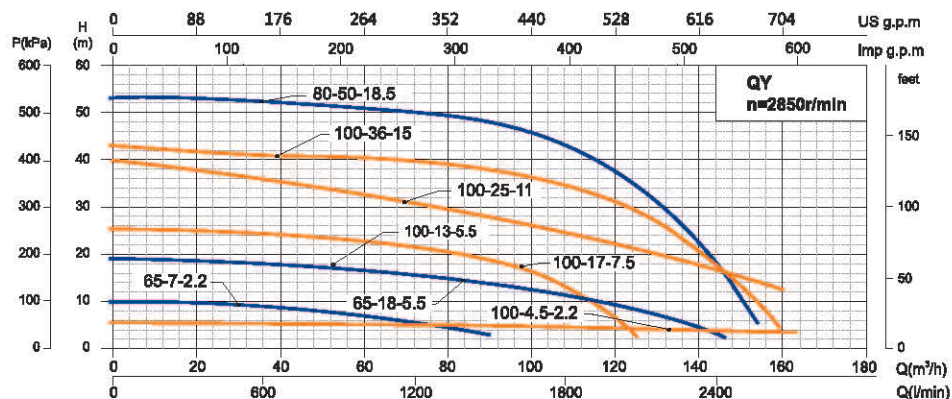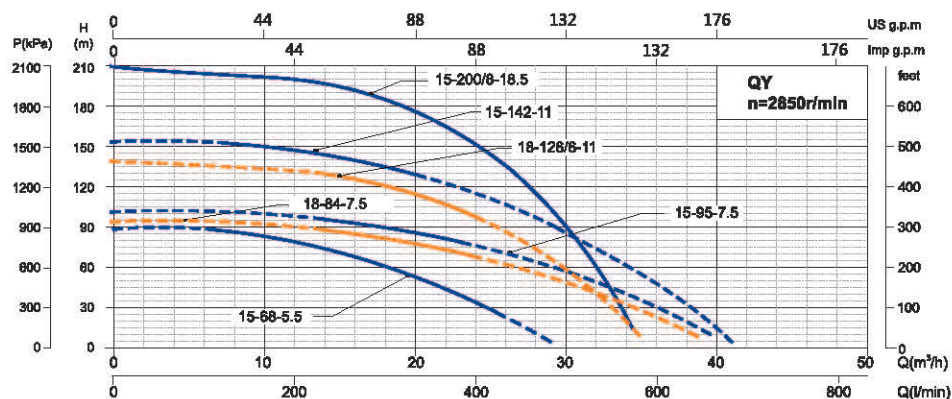


Model	Power		Rate Current (A)	Max. Flow (m³/h)	Max. Head (m)	Head Range (m)	Cable line (mm²-m)	Packing Dim. L×W×H(mm)	G.W (kg)	20'Loading Qty. (pcs)
Three-Phase	kW	HP								
QY15-26-2.2L3	2.2	3	5.4	28	30	30~0	4*1-15	630*260*315	48	504
QY25-17-2.2L3	2.2	3	5.4	30	20	20~0	4*1-15	630*260*315	48	504
QY65-7-2.2L3	2.2	3	5.4	80	10	10~0	4*1-8	685*235*290	49	504
QY100-4.5-2.2Z4	2.2	3	5.4	163	4.5	9.5~1.5	4*1-8	710*230*290	47	490
QY10-51/3-3L3	3	4	7.2	24.3	60	60~45	4*1-24	780*260*325	65	384
QY15-36-3L3	3	4	7.2	39.2	39	39~0	4*1-15	675*290*345	57	336
QY25-26-3L3	3	4	7.2	50.9	30	30~0	4*1-15	710*270*315	53	448
QY40-16-3L3	3	4	7.2	50	22	22~0	4*1-15	710*270*315	53	448
QY65-10-3L3	3	4	7.2	103	17	17~0	4*1-8	695*235*290	52	504
QY100-6-3Z4	3	4	7.2	175	6	6~1.5	3*1.5+10-8	735*230*295	54	504
QY160-4-3Z3	3	4	7.2	185	4	4~1.5	3*1.5+10-8	770*230*295	55	490
QY30-30-3.7L3	3.7	5	8.7	49	31	31~18	4*1-15	620*295*310	63	441
QY10-60/2-4L3	4	5.5	9.3	19.8	62	61~45	3*1.5+1*1-24	775*270*350	71	336
QY15-48/2-4L3	4	5.5	9.3	42	55	55~0	3*1.5+1*1-24	775*270*350	67	336
QY20-40/2-4L3	4	5.5	9.3	42	48	48~0	3*1.5+1*1-24	775*270*350	69	336
QY40-21-4L3	4	5.5	9.3	52	26	26~0	3*1.5+1*1-15	750*270*310	76	392
QY65-14-4L3	4	5.5	9.3	95	20	20~8	3*1.5+1*1-8	770*305*330	64	294
QY100-9-4L3	4	5.5	9.3	152	14	14~0	3*1.5+1*1-8	780*255*315	66	441
QY160-6-4Z3	4	5.5	9.3	225	10	6~2.5	3*1.5+1*1-8	780*255*315	59	420
QY200-4-4Z3	4	5.5	9.3	225	4	4~2.5	3*1.5+1*1-8	840*230*300	65	420
QY10-83/3-5.5L1	5.5	7.5	12.6	32	85	85~62	3*1.5+1*1-24	1050*330*400	113	150
QY15-68/4-5.5L1	5.5	7.5	12.6	28.3	88	87~28	3*1.5+1*1-24	935*320*370	99	252
QY25-40-5.5L1	5.5	7.5	12.6	68	43	43~33	3*1.5+1*1-24	775*340*395	81	210
QY40-28-5.5L1	5.5	7.5	12.6	72	34	34~19	3*1.5+1*1-15	770*335*385	83	252
QY65-18-5.5L2	5.5	7.5	12.6	140	19	19~0	3*1.5+1*1-15	845*295*380	90	252
QY100-13-5.5L1	5.5	7.5	12.6	148	19	19~0	3*1.5+1*1-15	845*295*380	92	252
QY160-8-5.5Z2	5.5	7.5	12.6	248	9	8~1.5	3*1.5+1*1-8	910*295*380	87	252
QY200-6-5.5Z1	5.5	7.5	12.6	240	6	6~0	3*1.5+1*1-8	885*295*380	91	252
QY250-5-5.5Z1	5.5	7.5	12.6	296	5	5~3.5	3*1.5+1*1-8	950*310*385	85	210
QY350-3.5-5.5Z1	5.5	7.5	12.6	400	10	3.5~2	3*1.5+1*1-8	950*310*385	91	210
QY10-110/4-7.5L1	7.5	10	16.8	32	115	115~84	3*2.5+1*1.5-24	1155*310*380	155	210
QY15-95/4-7.5L1	7.5	10	16.8	39	101	98~80	3*2.5+1*1.5-24	1155*310*380	136	210
QY18-84/4-7.5L1	7.5	10	16.8	38	94	88~70	3*2.5+1*1.5-24	1155*310*380	136	210
QY25-60/2-7.5L1	7.5	10	16.8	62	66	66~45	3*2.5+1*1.5-24	920*335*385	107	216
QY40-38-7.5L1	7.5	10	16.8	81	44	44~28	3*2.5+1*1.5-15	820*345*395	92	210
QY50-30-7.5L1	7.5	10	16.8	88	32	32~0	3*2.5+1*1.5-15	845*340*390	90	180
QY65-25-7.5L1	7.5	10	16.8	117	26	26~0	3x1.5+1x1 ☆ -15	845*295*380	101	252
QY80-20-7.5L1	7.5	10	16.8	128	24	24~0	3*2.5+1*1.5-15	845*295*380	101	252
QY100-17-7.5L1	7.5	10	16.8	125	22	22~0	3x1.5+1x1 ☆ -15	885*295*380	105	252
QY160-11-7.5Z1	7.5	10	16.8	200	11	11~2.5	3*2.5+1*1.5-8	990*295*380	111	210
QY200-9-7.5Z1	7.5	10	16.8	248	9	9~3	3*2.5+1*1.5-8	990*295*380	111	210
QY250-7-7.5Z1	7.5	10	16.8	323	7	7~3	3*2.5+1*1.5-8	950*310*385	97	210


Centrifugal pumps are not recommended to be used less than the lift range.
 Axial flow pumps are not recommended to be used higher than the lift range.

Model	Power		Rate Current (A)	Max. Flow (m ³ /h)	Max. Head (m)	Head Range (m)	Cable line (mm ² -m)	Packing Dim. LxWxH(mm)	G.W (kg)	20'Loading Qty. (pcs)
Three-Phase	kW	HP								
QY10-165/6-11L1	11	15	24.3	31	170	170~130	3*4+1*2.5-24	1285*310*380	161	168
QY15-142/6-11L1	11	15	24.3	39.7	157	157~130	3*4+1*2.5-24	1295*305*375	161	168
QY18-126/6-11L1	11	15	24.3	35	138	130~105	3*4+1*2.5-24	1300*310*380	161	168
QY25-90/3-11L1	11	15	24.3	63	101	95~68	3*4+1*2.5-24	1050*330*400	129	180
QY40-56/2-11L1	11	15	24.3	80	65	65~0	3*4+1*2.5-24	920*335*385	113	216
QY65-42/2-11L1	11	15	24.3	114	54	54~0	3*4+1*2.5-24	980*340*390	117	150
QY100-25-11L2	11	15	24.3	167	33	33~0	3*4+1*2.5-15	910*365*385	110	216
QY160-15-11L1	11	15	24.3	240	25	20~10	3*4+1*2.5-8	980*315*390	105	175
QY350-7-11Z1	11	15	24.3	419	7	7~2.5	3*4+1*2.5-8	1020*310*385	108	180
QY450-6-11Z1	11	15	24.3	538	6	6~2	3*4+1*2.5-8	1130*360*395	120	130
QY600-4.5-11/4Z1	11	15	24.3	810	4.5	4.5~2	3*6+1*4+2*1-8	1360*500*530	200	60
QY25-120/4-15L1	15	20	33	63	135	132~100	3*6+1*4+2*1-24	1310*340*420	205	120
QY40-84/3-15L1	15	20	33	75	98	97~67	3*6+1*4+2*1-24	1120*340*420	183	120
QY65-60/3-15L1	15	20	33	111	82	78~48	3*6+1*4+2*1-24	1215*340*420	188	120
QY100-36-15L1	15	20	33	159	42	42~0	3*6+1*4+2*1-15	1020*400*460	167	120
QY160-23-15L1	15	20	33	248	39	39~0	3*6+1*4+2*1-15	1070*420*480	172	120
QY250-14-15L1	15	20	33	336	29	29~0	3*6+1*4+2*1-8	1185*340*440	171	120
QY600-6.5-15/4Z1	15	20	33	920	13	6.5~1	3*6+1*4+2*1-8	1430*500*530	231	50
QY15-200/8-18.5L1	18.5	25	42.4	34	212	212~0	3*6+1*4+2*1-24	1615*340*420	262	120
QY25-135/4-18.5L1	18.5	25	42.4	63	146	142~105	3*6+1*4+2*1-24	1355*340*420	215	120
QY65-69/3-18.5L1	18.5	25	42.4	111	87	87~0	3*6+1*4+2*1-24	1255*340*420	203	120
QY80-50-18.5L1	18.5	25	42.4	154	53	53~0	3*6+1*4+2*1-15	1070*400*460	180	125
QY160-28-18.5L1	18.5	25	42.4	264	42	42~0	3*6+1*4+2*1-15	1105*420*465	186	125
QY250-18-18.5	18.5	25	42.4	360	33	33~0	3*6+1*4+2*1-15	1225*340*440	186	120
QY800-6-18.5/4Z1	18.5	25	42.4	1000	13	6~1	3*6+1*4+2*1-8	1430*500*530	293	50
QY25-180/4-22L1	22	30	42.4	48	190	183~114	3*10+1*6+2*1-24	1455*350*420	271	120
QY40-114/3-22L1	22	30	42.4	80	127	127~70	3*10+1*6+2*1-24	1425*350*420	244	120
QY65-84/4-22L1	22	30	42.4	112	110	110~0	3*10+1*6+2*1-24	1375*350*420	235	120
QY200-26-22L1	22	30	42.4	360	38	38~0	3*10+1*6+2*1-15	1260*340*440	198	120
QY250-22-22L1	22	30	42.4	360	38	38~0	3*10+1*6+2*1-15	1260*340*440	198	120
QY800-7.5-22/4Z1	22	30	48.1	1000	13	7.5~1	3*10+1*6+2*1-8	1430*500*530	313	50

Centrifugal pumps are not recommended to be used less than the lift range.
Axial flow pumps are not recommended to be used higher than the lift range.

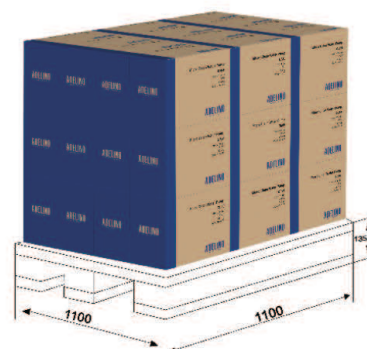


Dimensions & Weight

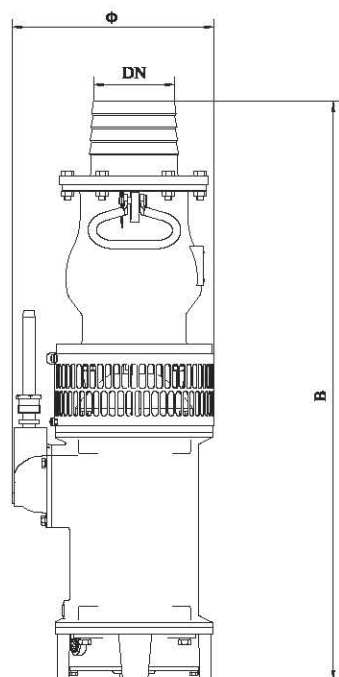

Model	Dim.(mm)			N.W. (kg)
Three-Phase	Ø	B	DN	
QY15-26-2.2L3	265	570	2"	44
QY25-17-2.2L3	255	550	2.5"	44
QY65-7-2.2L3	240	605	4"	46
QY100-4.5-2.2Z4	240	635	6"	45
QY10-51/3-3L3	245	700	2"	61
QY15-36-3L3	290	595	2"	53
QY25-26-3L3	265	585	2.5"	49
QY40-16-3L3	265	600	3"	49
QY65-10-3L3	240	630	4"	48
QY100-6-3Z4	240	660	6"	52
QY160-4-3Z3	245	685	6"	51
QY30-30-3.7L3	270	625	2.5"	59
QY10-60/2-4L3	270	670	2"	66
QY15-48/2-4L3	270	680	2"	62
QY20-40/2-4L3	270	675	2.5"	64
QY40-21-4L3	265	635	3"	55
QY65-14-4L3	280	675	4"	59
QY100-9-4L3	255	695	6"	61
QY160-6-4Z3	250	725	6"	54
QY200-4-4Z3	250	740	8"	60
QY10-83/3-5.5L1	265	960	2"	106
QY15-68/4-5.5L1	265	805	2.5"	100
QY25-40-5.5L1	265	675	2.5"	83
QY40-28-5.5L1	265	680	3"	84
QY65-18-5.5L2	265	735	4"	84
QY100-13-5.5L1	265	750	6"	82
QY160-8-5.5Z2	265	770	6"	81
QY200-6-5.5Z1	265	785	8"	81
QY250-5-5.5Z1	275	815	8"	82
QY350-3.5-5.5Z1	275	815	8"	86
QY10-110/4-7.5L1	265	1060	2"	147
QY15-95/4-7.5L1	275	1065	2.5"	128
QY18-84/4-7.5L1	275	1065	2.5"	128
QY25-60/2-7.5L1	290	815	2.5"	104
QY40-38-7.5L1	265	725	3"	85

Dimensions & Weight

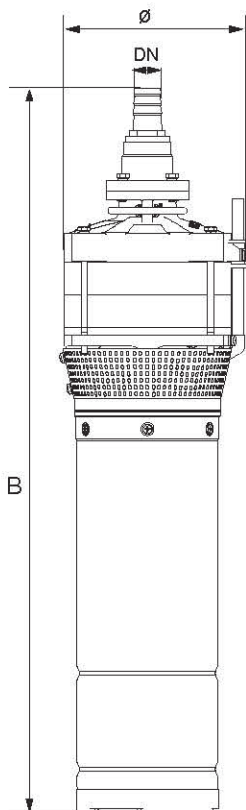

Model	Dim.(mm)			N.W. (kg)
Three-Phase	ø	B	DN	
QY50-30-7.5L1	295	750	3"	90
QY65-25-7.5L1	265	750	4"	86
QY80-20-7.5L1	265	750	4"	84
QY100-17-7.5L1	265	805	6"	89
QY160-11-7.5Z1	265	885	6"	96
QY200-9-7.5Z1	265	900	8"	96
QY250-7-7.5Z1	275	890	8"	91
QY10-165/6-11L1	265	1200	2"	151
QY15-142/6-11L1	265	1205	2.5"	153
QY18-126/6-11L1	265	1205	2.5"	153
QY25-90/3-11L1	290	915	2.5"	122
QY40-56/2-11L1	290	825	3"	109
QY65-42/2-11L1	305	885	4"	111
QY100-25-11L2	270	881	4"	104
QY160-15-11L1	280	890	6"	102
QY350-7-11Z1	275	925	8"	102
QY450-6-11Z1	310	1025	10"	118
QY600-4.5-11/4Z1	440	1250	14"	182
QY25-120/4-15L1	325	1180	2.5"	194
QY40-84/3-15L1	325	990	3"	173
QY65-60/3-15L1	325	1085	4"	177
QY100-36-15L1	340	910	4"	158
QY160-23-15L1	350	960	6"	165
QY250-14-15L1	320	1075	8"	161
QY600-6.5-15/4Z1	440	1320	14"	213
QY15-200/8-18.5L1	320	1480	2"	249
QY25-135/4-18.5L1	325	1220	2.5"	203
QY65-69/3-18.5L1	325	1125	4"	192
QY80-50-18.5L1	340	950	6"	170
QY160-28-18.5L1	350	1000	6"	176
QY250-18-18.5	320	1115	8"	176
QY800-6-18.5/4Z1	440	1280	14"	275
QY25-180/4-22L1	325	1320	2"	259
QY40-114/3-22L1	325	1270	3"	232
QY65-84/4-22L1	325	1240	4"	223
QY200-26-22L1	320	1145	6"	188
QY250-22-22L1	320	1145	8"	188
QY800-7.5-22/4Z1	440	1320	14"	295