



Performance Curve

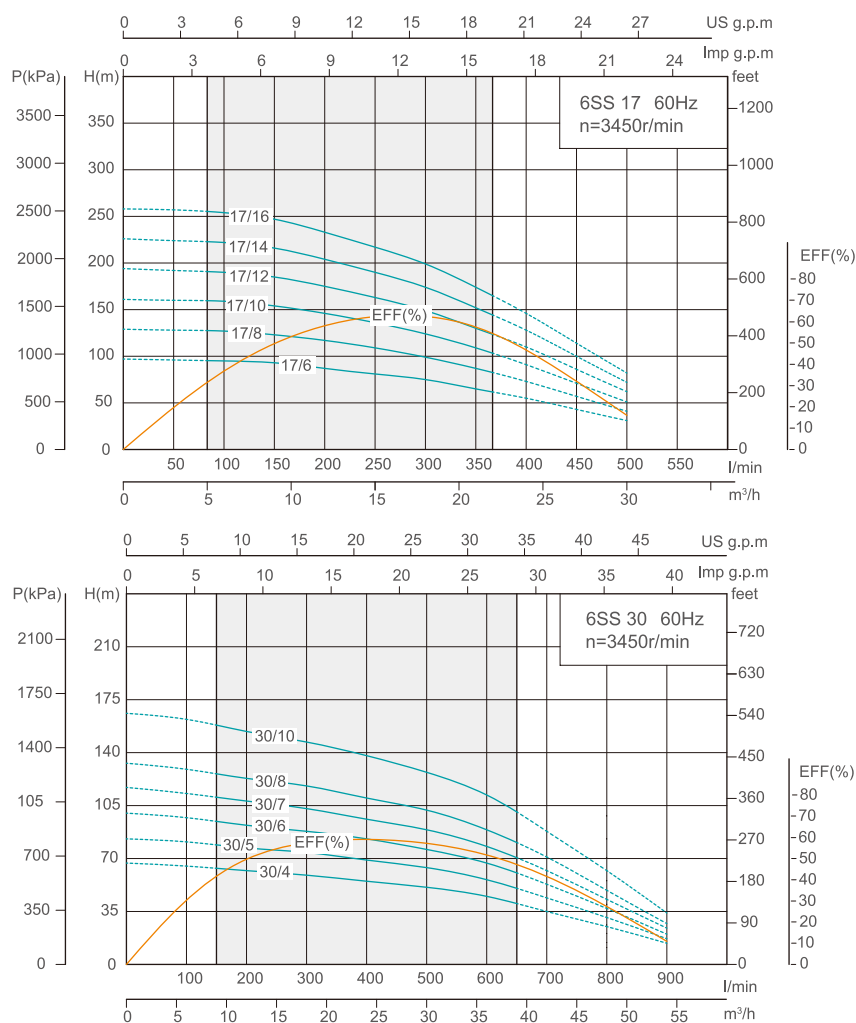

Model	Power		Current (A)	Flow												Head
Three-Phase	kW	HP	Three-Phase	m³/h	0	3	6	9	12	15	18	21	24	27	30	Range (m)
220V/380V			220V/380V	l/min	0	50	100	150	200	250	300	350	400	450	500	
6SS17/6	5.5	7.5	23/13	H(m)	97	96	95	93	87	81	75	65	55	43	31	95~63
6SS17/8	7.5	10	31/18		129	128	127	123	117	109	99	87	73	57	41	127~84
6SS17/10	9.2	12.5	40/23		161	160	159	154	146	136	124	109	91	71	51	159~105
6SS17/12	11	15	45/26		194	192	190	185	175	163	149	130	110	86	62	190~125
6SS17/14	13	17.5	57/33		226	224	222	216	204	190	174	152	128	100	72	223~147
6SS17/16	15	20	60/35		258	257	254	247	233	217	199	174	146	114	82	255~168


Model	Power		Current (A)	Flow											Head
Three-Phase	kW	HP	Three-Phase	m³/h l/min	0	6	12	18	24	30	36	42	48	54	Range (m)
220V/380V			220V/380V		0	100	200	300	400	500	600	700	800	900	
6SS30/4	5.5	7.5	23/13	H(m)	67	65	62	59	55	51	45	35	25	14	63~40
6SS30/5	7.5	10	31/18		83	81	77	74	69	64	56	44	31	17	79~50
6SS30/6	9.2	12.5	40/23		100	97	92	88	83	76	67	53	37	20	95~60
6SS30/7	11	15	45/26		117	113	108	103	96	89	78	62	43	24	110~70
6SS30/8	13	17.5	57/33		133	129	123	118	110	102	89	71	49	27	126~80
6SS30/10	15	20	60/35		166	162	154	147	138	127	112	88	62	34	158~100

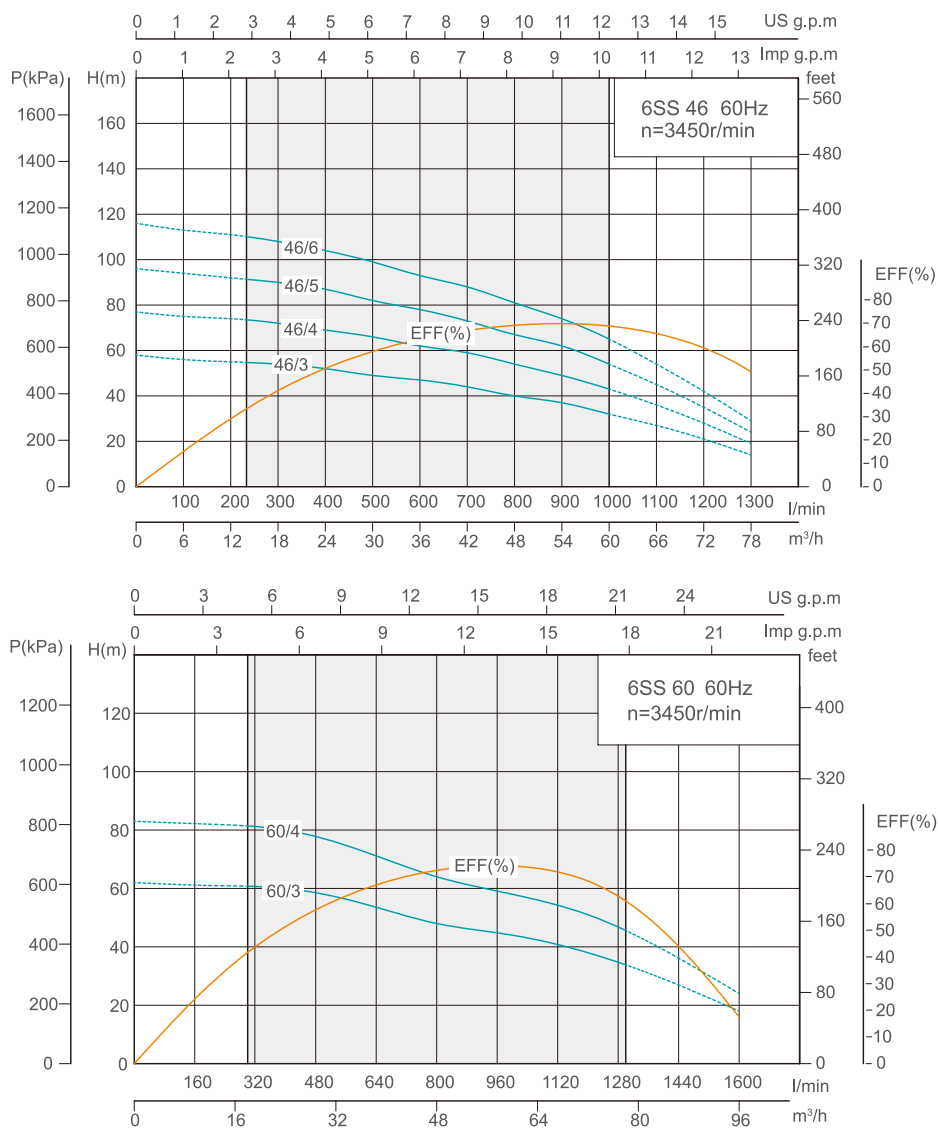

Model	Power		Current (A)	Flow																Head
Three-Phase	kW	HP	Three-Phase	m³/h	0	6	12	18	24	30	36	42	48	54	60	66	72	78	Range (m)	
220V/380V			220V/380V	l/min	0	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300		
6SS46/3	7.5	10	31/18	H(m)	58	56	55	54	52	49	47	44	40	37	32	27	21	14	55~32	
6SS46/4	11	15	45/26		77	75	74	72	69	66	62	59	54	49	43	36	28	19	73~43	
6SS46/5	13	17.3	57/33		96	94	92	90	87	82	78	73	67	62	54	45	35	24	91~54	
6SS46/6	15	20	60/35		116	113	111	108	104	99	93	88	81	74	65	54	42	29	110~65	

Model	Power		Current (A)	Flow											Head Range (m)
Three-Phase	kW	HP	Three-Phase	m³/h	0	12	24	36	48	60	72	84	96		
220V/380V			220V/380V	l/min	0	200	400	600	800	1000	1200	1400	1600		
6SS60/3	11	15	45/26	H(m)	62	61	60	55	48	44	38	29	18	61~34	
6SS60/4	15	20	60/35		83	82	80	73	64	58	51	39	24	81~45	

Components & Materials

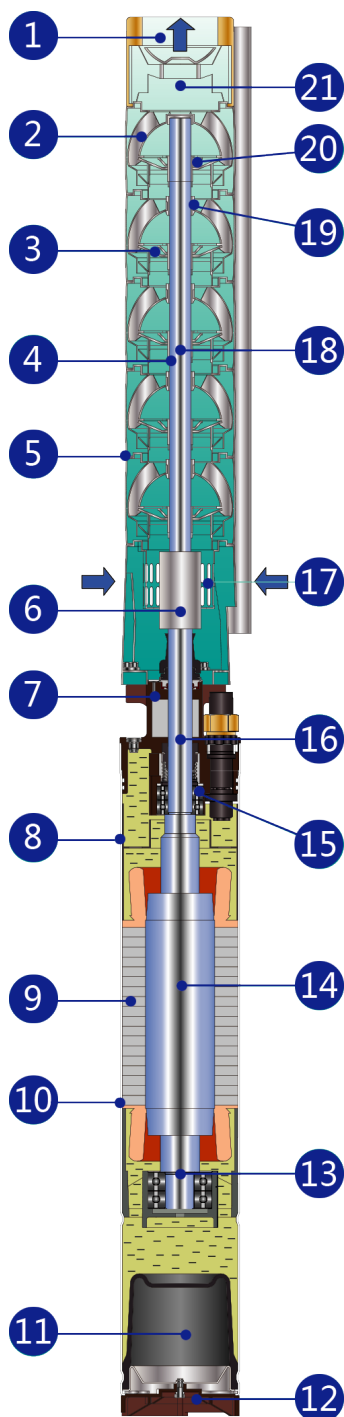

No.	Component	Material
1	Discharge Chamber	Stainless Steel
2	Guide Vanes	Stainless Steel
3	Impeller	Stainless Steel
4	Bearing Sleeve	Stainless Steel
5	Cable Guard	Stainless Steel
6	Shaft Coupling	Stainless Steel
7	Oil Chamber	HT200
8	Waterproof Sleeve	PA66
9	Stator	---
10	Motor Housing	Stainless Steel
11	Pressure Regulating Membrane	NBR
12	Base	PA66
13	Bearing	5.5~7.5Kw:7306B DT 9.2~15kW:7306BWG
14	Rotor	AISI 304 + Steel 45#
15	Bearing	2x6205
16	Mechanical Seal	FP/25 A:S(PC)
17	Inlet Part	Stainless Steel
18	Pump Shaft	Stainless Steel
19	Rubber Bearing	NBR
20	Lock Nut	Stainless Steel
21	Valve Deck	Stainless Steel